


Product Name	HDMI Male to Female Adapter--Left
Product Numbers	SF-CV306

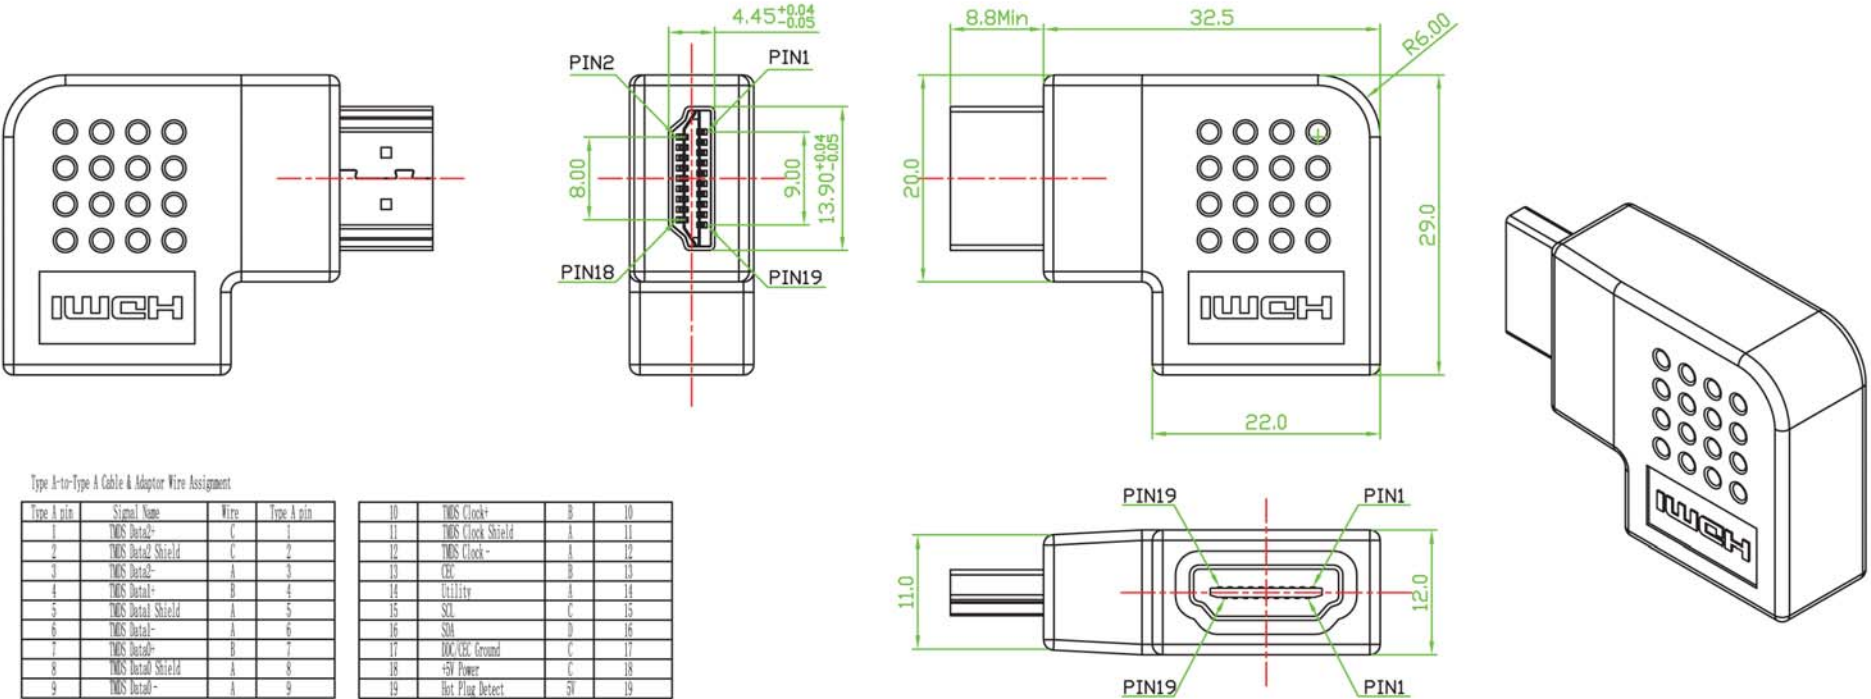

Type A-to-Type A Cable & Adapter Wire Assignment

Type A pin	Signal Name	Wire	Type A pin	Type A pin	Signal Name	Wire	Type A pin
1	TMS Data2+	C	1	10	TMS Clock+	B	10
2	TMS Data2 Shield	C	2	11	TMS Clock Shield	A	11
3	TMS Data2-	A	3	12	TMS Clock-	A	12
4	TMS Data1+	B	4	13	CEC	B	13
5	TMS Data1 Shield	A	5	14	Utilitv	A	14
6	TMS Data1-	A	6	15	SCL	C	15
7	TMS Data0+	B	7	16	SDA	D	16
8	TMS Data0 Shield	A	8	17	IOCC/CEC Ground	C	17
9	TMS Data0-	A	9	18	+5V Power	C	18
				19	Hot Plug Detect	SV	19

备注:

- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- DIELECTRIC STRENGTH : 500 VAC MIN.
- INSULATION RESISTANCE : 100 MEGOHMS MIN.
- OPERATING TEMPERATURE : -20℃ TO +85℃.
- UNDERPLATING : NICKEL ALL OVER.

NO.	SUB PART NAME OR NO.	MATERIAL	MANUF ACTURE TYPE & FINISH	QTY	REMARK
1	HDMI AF	LCP/IRON/CU	SHELL/TERMINAL GOLD PLATED	1	
2	HDMI AM	LCP/IRON/CU	SHELL/TERMINAL GOLD PLATED	1	
3	HDMI AM TO AF PCB	PHENOLIC RESIN LAMINATE		1	
4	OVER MOLDING	PVC LCP/IRON/CU	COLOR:BLACK	1	

REV.	DESCRIPTION			DATE
	TOLERANCE INCHES M/M			SFCABLE.COM TITLE: SF-CV306
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY	Dawson			HDMI Male to Female Adapter--Left
CHECK BY				SCALE NONE DRAWING NO:
APPD BY				UNIT MM REV. A
				DATE 2013.03.08 1/3