

Electrical Test:


1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 5 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot:100V DC/10ms

- Support DisplayPort 1.2 input and HDMI1.4 output.
- Support HDMI highest video resolution 4K*2K@30Hz.

CABLE MARKING:

DisplayPort Cable E515987 兄 AWM STYLE 20276 80°C 30V VW-1 C1

L	P/N
915±30MM	10DP-DPHM2-03
1830±30MM	10DP-DPHM2-06
3050±40MM	10DP-DPHM2-10
4575±50MM	10DP-DPHM2-15

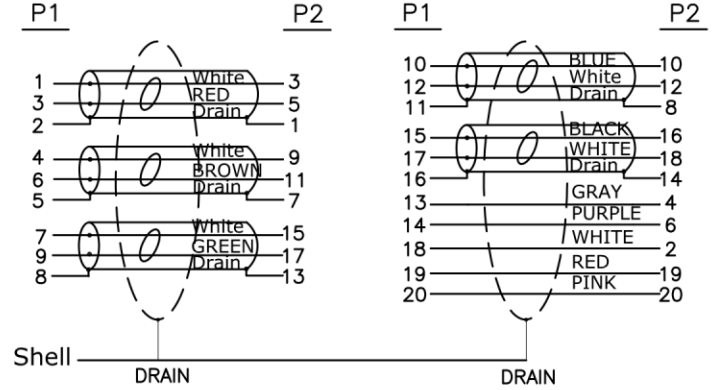

NO	DESCRIPTION	Q'TY	UNIT
12	DisplayPort M ABS Under the Shell Color: Black	1	pcs
11	DisplayPort M ABS On the Shell Color: Black	1	pcs
10	DisplayPort Port M 28AWG cable clip	1	pcs
9	DisplayPort Port M Insulation Black Shell Gold Plated	1	pcs
8	DisplayPort M Transparent dust cover	1	pcs
7	HDMI M Transparent dust cover	1	pcs
6	H. S. T: φ 1.5*16mm Color: Black	0.032	m
5	MINI DP TO PCB 28AWG cable clip	1	pcs
4	Transparent PE	4	g
3	45P PVC Color:Black	10	g
2	MDPH12M-15FT With PCBA	1	pcs
1	DP UL20276 (7/0.127TA*1PR+EAM)*5+7/0.127TA*5C+AEB 85% OD:7.3MM Color: Black	L	m

TOLERANCE	INCHES		M/M	
	.X	.015		.30
	.XX	.010		.10
	.XXX	.005	.05	
DRAWN BY	Hong			
CHECK BY				
APPD BY				

TITLE: DP TO HDMI M/M 28AWG			
CUSTOMER :			
CUSTOMER P/N :		SF-DPHM-XX	
SCALE	NONE	DRAWING NO.:	REV. A1
UNIT	MM		
DATE	2019.04.10		1/1