


Irrigation Cables

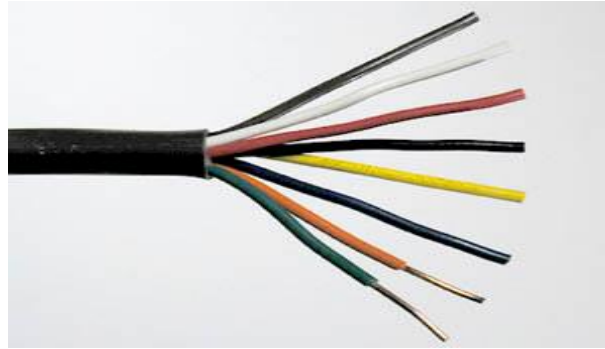

Description

Gauge Size	Conductors	Gauge Size	Conductors
18	2	18	9*
18	3	18	10*
18	4*	18	11*
18	5*	18	12*
18	6*	18	13*
18	7*	18	16*
18	8*		

* Cables of four conductors or more are twisted prior to jacketing.

Construction

Solid Copper Conductors insulated with color coded PVC.
Jacket: PE (Polyethylene) **Insulation:** PVC (Polyvinyl Chloride)
Installation Temp: 0°C - 60°C **Storage Temp:** -20°C - 75°C
Polarity is identified by surface ridges Zip cord type Voltage: 30V

Part Numbers

Part Number	Color	Footage	Put-up
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel
	Black	500'	Reel

Cable Marking

XXXXXX 18 AWG #/C SPRINKLER SYSTEMS WIRE "ULECC" (UL) 30VAC - DIRECT BURIAL ****FT