


P1: M-083A


P2: M-005

Customer No.: No.1

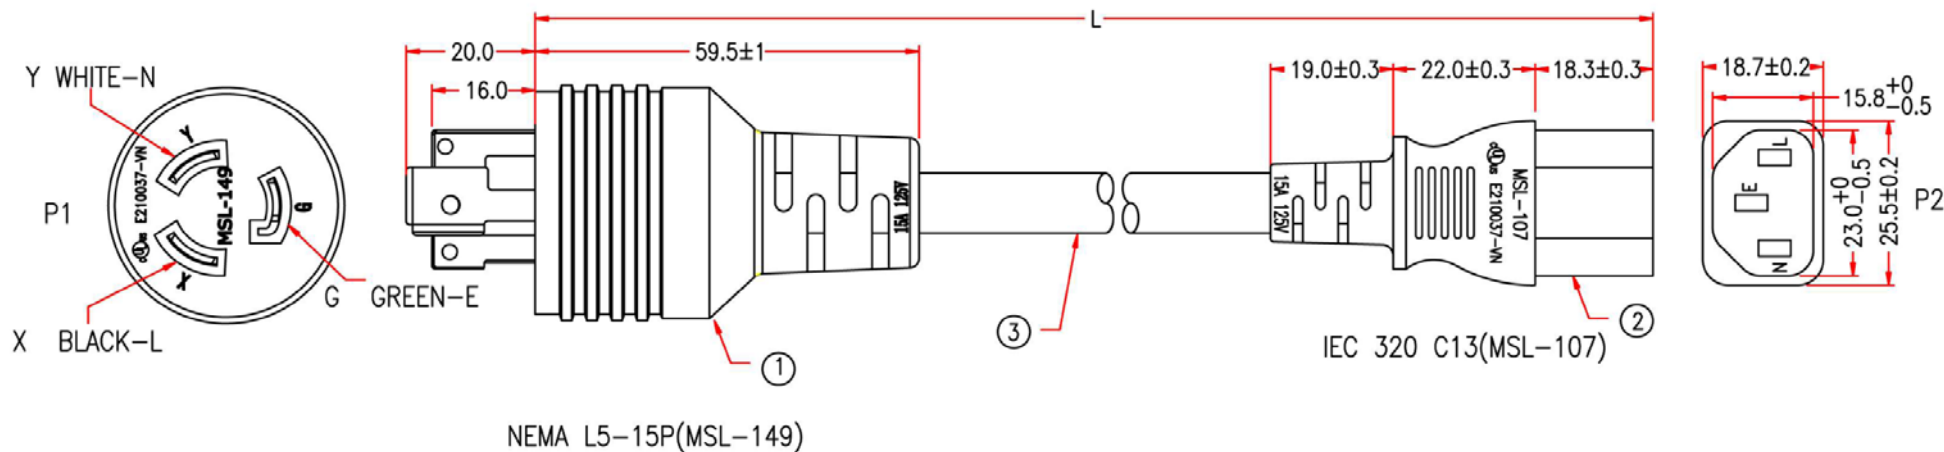

P/N	L(mm)
SF-L515P-C13-03	915mm
SF-L515P-C13-06	1830mm
SF-L515P-C13-08	2440mm
SF-L515P-C13-10	3050mm
SF-L515P-C13-15	4570mm

PACKING:



MARKING:

(UL) SJT 3/C 14AWG(2.08MM<sup>2</sup>) VW-1 105°C 300V E204978 C(UL)  
SJT 3/C 2.08MM<sup>2</sup>(14AWG) FT2 105°C 300V E204978 MSL-VN-

107149B2F14A(FP488-00)			
	P1		P2
BLACK	X	_____	L
WHITE	Y	_____	N
GREEN	G	_____	E

P1,P2: cULus E210037-VN

NOTE: All relevant materials are complied with RoHS directive .  
THE MARKING IS PROTRUDING LETTERING MOULD

3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No. EPSV1011403C-147	H5TC21-0304K09	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YS-003	A1QC14-0767	1	M767
1	TERMINAL: 2*4mm, 98744L	A1QB42-0257	3	M257
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	TERMINAL: YST-149-NJ	A1QC81-0767K09	1	M767
	TERMINAL: 95672BL-0(E)	A1QB53-0257	1	M257
	TERMINAL: 95673BL-0(E)	A1QB54-0257	2	M257

No.	DESCRIPTION		Q'TY	Supplier
APPROVED		 <b>SF Cable</b> 1-888-275-8755	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED	HU			
DESIGNER	XJW			
DRAWING	WEI			
DATE	06/MAR/23			
ITEM NO.	SF-L515P-C13		UNIT:mm	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm