


P1: M-044

P2: M-048A

Customer No.: No.:1

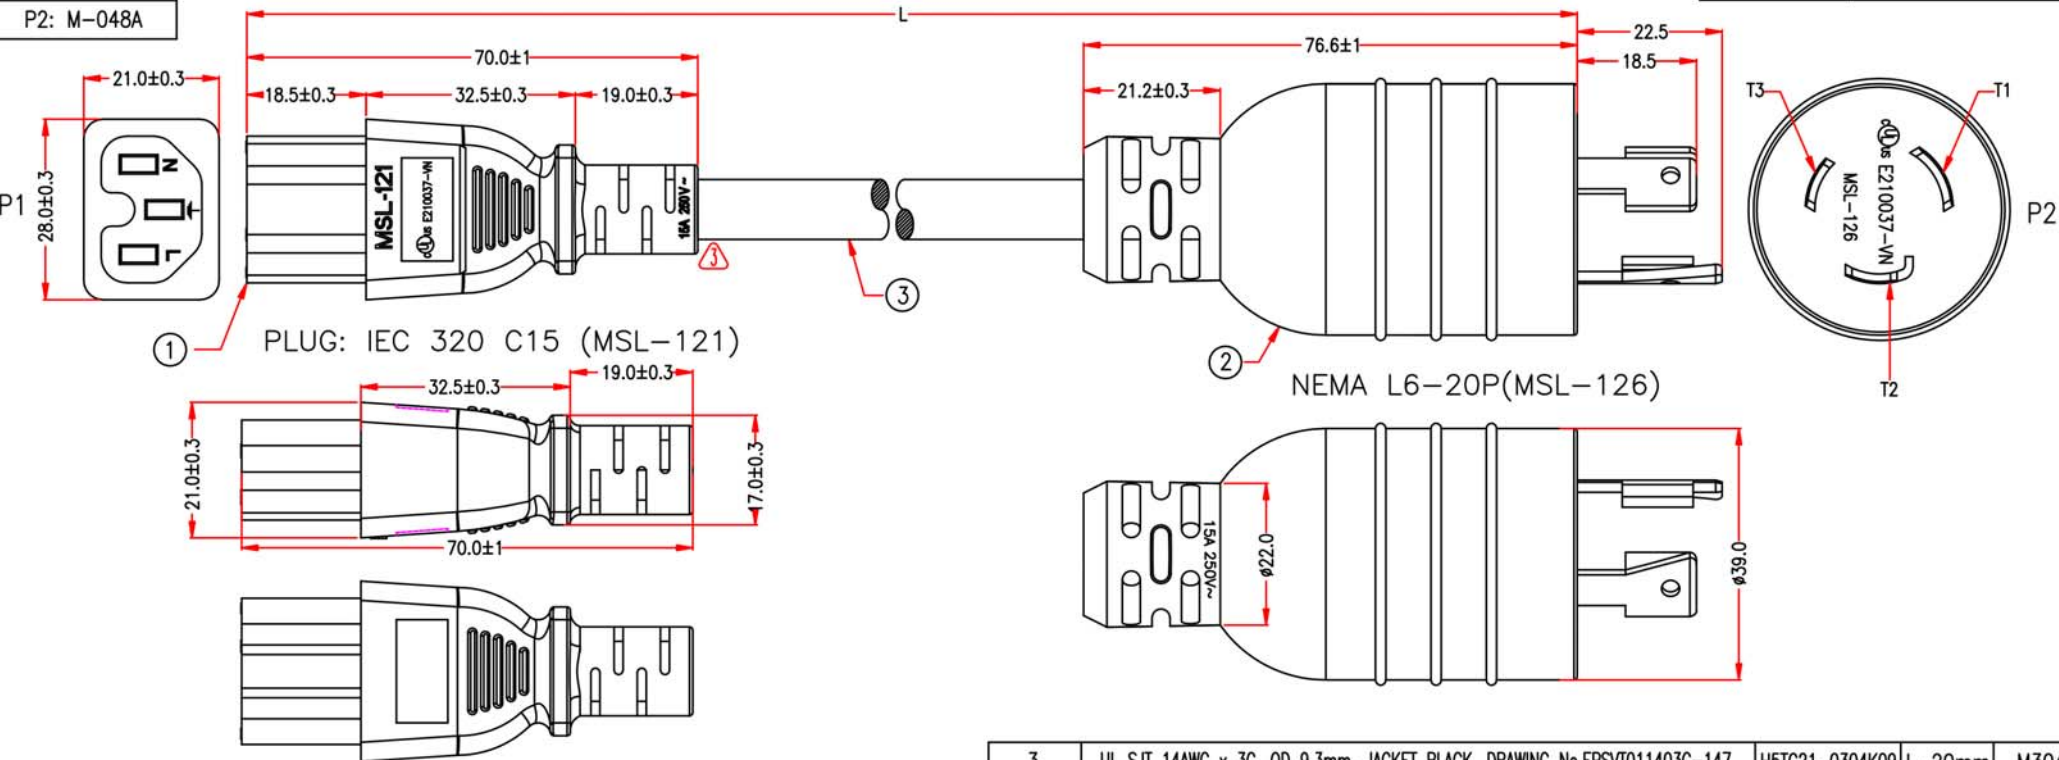

P1,P2:  $\varnothing$  E210037

NOTE: All relevant materials are complied with RoHS directive .  
THE MARKING IS CONCAVE LETTERING MOULD

MARKING: (UL) SJT 3/C 14AWG(2.08MM<sup>2</sup>) VW-1 105°C 300V E204978

$\triangle$  C(UL) SJT 3/C 2.08MM<sup>2</sup>(14AWG) FT2 105°C 300V E204978 MSL-VN-

P/N	LENGTH(Lmm)
SF-L620C15-06	1830mm
SF-L620C15-08	2440mm
SF-L620C15-10	3050mm
SF-L620C15-12	3658mm
SF-L620C15-15	4570mm

121126B2F14A(FP314-00)	
P1	P2
BLACK L _____	T3
WHITE N _____	T1
GREEN E _____	T2

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 14AWG x 3C, OD 9.3mm, JACKET BLACK, DRAWING No.EPSVT011403C-147	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET: YS-L6	1	M767
	TERMINAL: 97656BL-0 (T3)	1	M257
	TERMINAL: 97655BL-0 (T2)	1	M257
1	MOLDED PVC 35P, COLOR BLACK		M304
	BRACKET:9745C	1	M767
	TERMINAL:98745L	3	M257

APPROVED		 <h1>SF Cable</h1> <p>— 1-888-275-8755 —</p>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DESIGNER	XJW		
DRAWING	WEI		
DATE	17/OCT/23		
ITEM NO.	SF-L620C15-XX	UNIT:mm	

$\triangle$ REV.3 2023.10.17	MODIFY MARKING AND WORD MODEL
$\triangle$ REV.2 2021.12.13	MODIFY CABLE LETTERING CONTENT
$\triangle$ REV.1 2020.05.15	MODIFY P2 CONTACT