


P1: M-042

P2: M-071A

Customer No: No:1

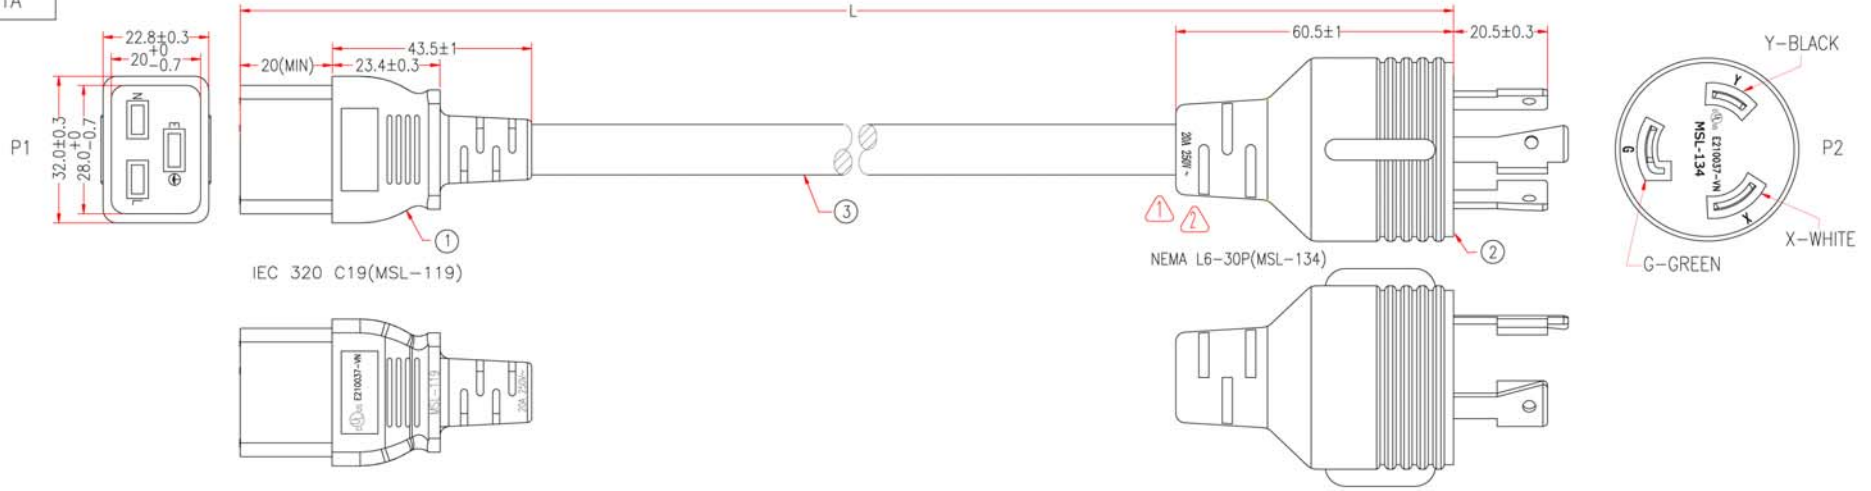

P1,P2: cULus E210037-VN

NOTE: All relevant materials are complied with RoHS directive .  
THE MARKING IS CONCAVE LETTERING MOULD:

PACKING A: ≤1FT    PACKING B: ≤2FT    PACKING C: >2FT



MARKING: (UL) SJT 3/C 12AWG(3.31MM<sup>2</sup>) VW-1 105°C 300V E204978  
C(UL) SJT 3/C 3.31MM<sup>2</sup>(12AWG) FT2 105°C 300V E204978 MSL-VN-

119134B2F12E(FP309-04)	
P1	P2
BLACK L	Y
WHITE N	X
GREEN E	G

3	UL SJT 12AWG x 3C, OD 11.0mm, JACKET BLACK, DRAWING No.EPSJT011203C-158	H5TC41-0304K09	L-20mm	M304
2	MOLDED PVC 35P, COLOR SEE LIST	H1BC02-0304		M304
	BRACKET: YST-FB-6-30P(NEMAL6-30P)	A1QC78-0767	1	M767
	TERMINAL: 95657	A1RQ34-0257	1	M257
	TERMINAL: 95658	A1RQ35-0257	1	M257
	TERMINAL: 95659	A1RQ36-0257	1	M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09		M304
	BRACKET: YST-037, COLOR BLACK	A1QC36-0767K09	1	M767
	TERMINAL: 98739ABS-0	A1QB33-0257	3	M257
No.	DESCRIPTION	Q'TY		Supplier

APPROVED		<p><b>SFCable</b> - 1-888-275-8755 -</p>	Cable Length Unless Other Spec.		
CHECKED	HU		Tolerances:		
DESIGNER	XJW		0 ~200mm	±10mm	
DRAWING	DAI		201~1000mm	±20mm	
DATE	24/JAN/24	ITEM NO.	SF-L63019-XX	1001 ~1500mm	±25mm
				UNIT:mm	1501~2100mm
				2100mm↑	±40mm