


Product Name	Micro USB Male 90° to A Female OTG Cable
Product Numbers	SF-MB2AF1

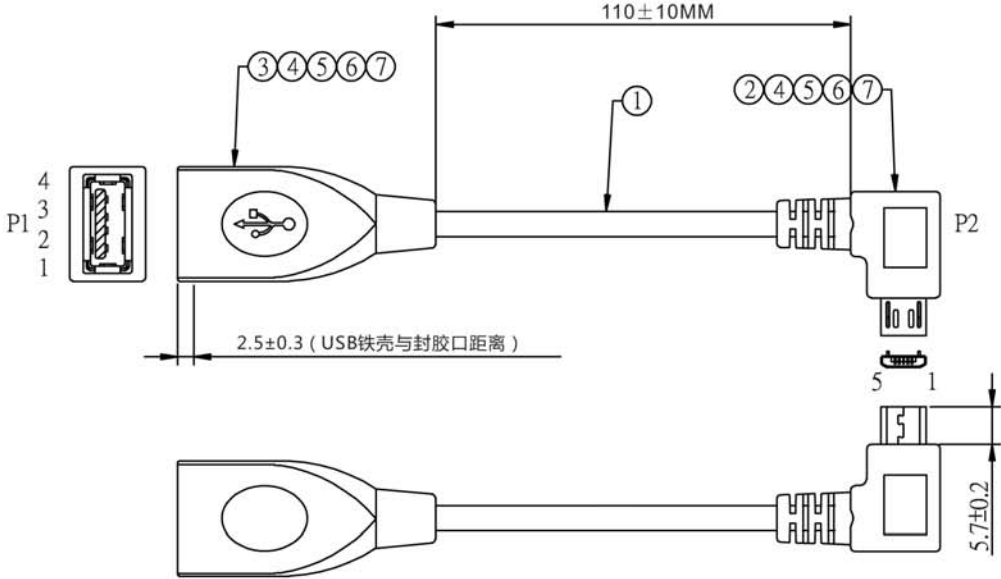

WIRE DIAGRAM

P1		P2	COLOR
1	#28	1	RED
2	#28	2	WHITE
3	#28	3	GREEN
4	#28	5	BLACK
		4	
SHELL		SHELL	BRAID

TEST CONDITION:
1.100% OPEN SHORT & MISS WIRE TEST.
2.CONDUCTOR RESISTANCE:3 Ohms Max.
3.INSULATION RESISTANCE:10M Ohms Min.
4.HI-POT:300V DC.

7	Ø1.0mm ROUNDTIN	0.2	G	REV.	DESCRIPTION				DATE		
6	HEAT SHRINK TUBEØ1.0*7mm Black	2	PCS		TOLERANCE INCHES M/M			SFCABLE.COM			
5	OUTER MOLDED 45P PVC BLACK	10	G		.X	.015	.30				
4	INNER MOLDED LDPE CLEAR	3	G		.XX	.010	.10				
3	USB A F CONN SOLDER TYPE SHELL NICKEL PLATED PIN G/F INSULATION WHITE 铁壳镀镍护套 两件式	1	SET		.XXX	.005	.05				
2	MICRO USB BM 5P CONN SOLDER TYPE SHELL NI PLATED PIN G/F INSULATION BLACK	1	PC	DRAWN BY	Dawson		Micro USB Male 90° to A Female OTG Cable				
1	UL2725#28(7/0.12mm镀锡铜) *1P+#28(7/0.12mm镀锡铜) * 2C+AL+B(16/3/0.1mm镀锡铜包钢) OD : 3.8mm Black L=100mm	1	PC	CHECK BY			SCALE	NONE	DRAWING NO:		REV. A
NO.	DESCRIPTION	Q'TY	UNIT	APPD BY			UNIT	MM			1/3
							DATE	2013.03.08			