


Product Name	Mini USB 5pin to USB OTG cable
Product Numbers	SF-MB52AF1

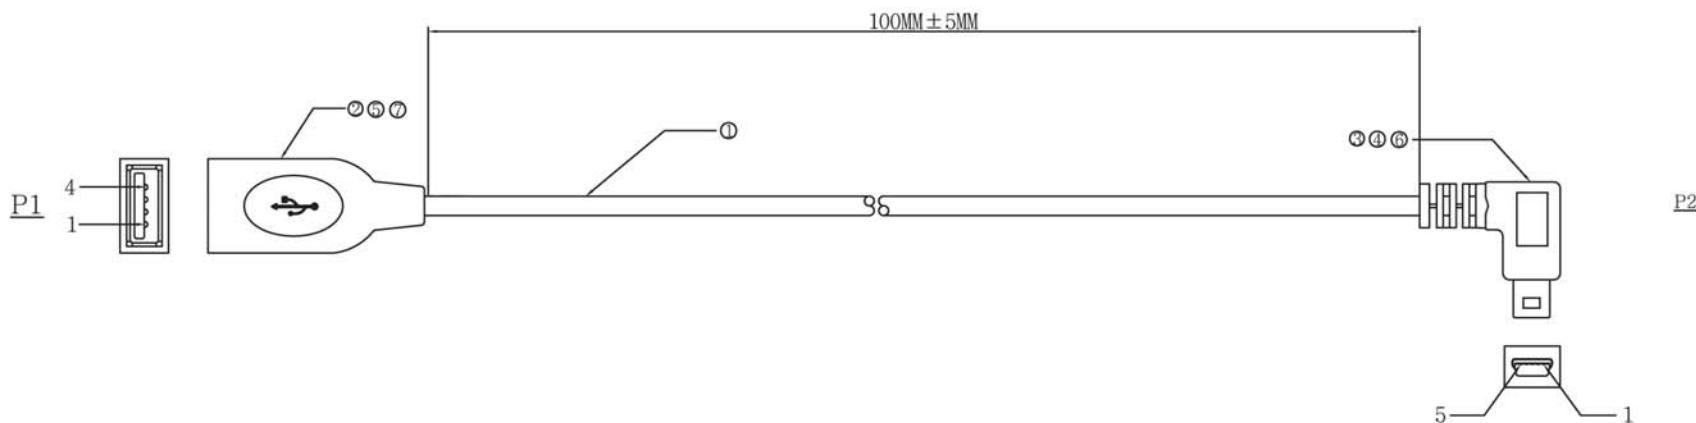

## 电气测试：

1. 成品摇摆测试，分四个方向“北.南.东.西”的顺序做45度摇摆测试
2. 成品要求测试开路.短路和错位。
  - A. 导通电阻；5 ohm(最大)；
  - B. 绝缘电阻；10M ohm(最小)；
  - C. 高压测试；200伏DC/10ms。

PIN ASSIGNMENT				
USB A/F		MINI5P		
1	Red	1		
2	White	2		
3	Green	3		
4	Black	4		
	Ground braid	5		
	iron housing			iron housing

NO.	NAME	SPECIFICATION
5	outer mold	PVC 45P Black out mold material
4	inner mold	PE inner mold material
3	connector	MINI 5PIN Nickel plated One-Piece
2	connector	USB A/F 4PIN Nickel plated
1	wire	UL2725#28AWG*1P+28#AWG*2C+AEB(48/0.10TS) OD=3.8mm L=100mm PVC Black 45P

REV.	DESCRIPTION		DATE	
①	TOLERANCE INCHES M/M		SFCABLE.COM	
.X	.015	.30	TITLE: SF-MB52AF1	
.XX	.010	.10	Mini USB 5pin to USB OTG cable	
.XXX	.005	.05	DRAWING NO:	
DRAWN BY	Dawson		SCALE	NONE
CHECK BY			UNIT	MM
APPD BY			DATE	2013.03.08
			REV.	A
				1/3