



P1: M-Y084A
M-084A


Customer No.: No.1

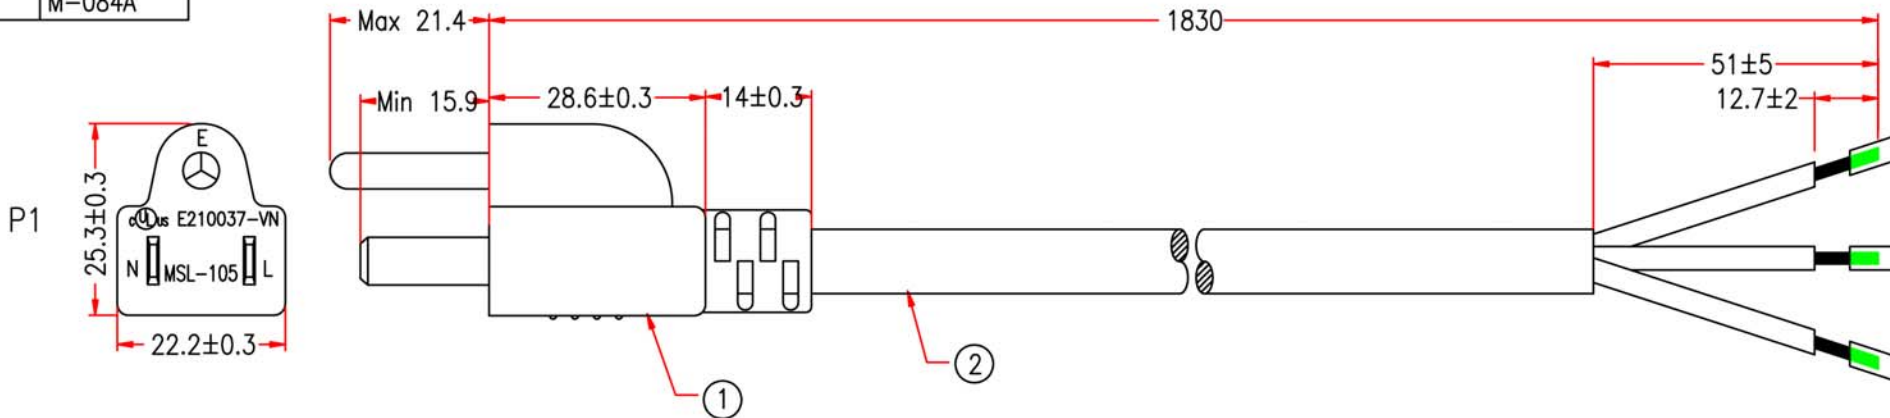

NEMA 5-15P (MSL-158)

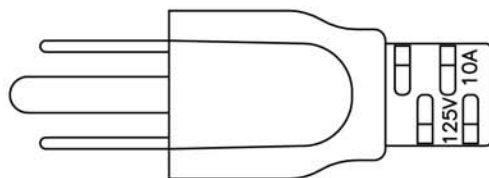

PACKING :

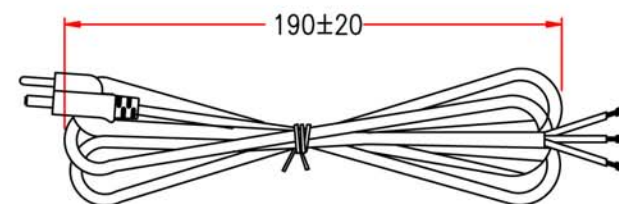

MARKING:

(UL) SJT 3/C 18AWG(0.824MM²) VW-1 105°C 300V E204978 C(UL)

SJT 3/C 0.824MM²(18AWG) FT2 105°C 300V E204978 MSL-VN-

P1: cULus E210037-VN

* NOTE: All relevant materials are complied with RoHS directive .
THE CABLE MARKING IS CONCAVE LETTERING MOULD

158BB2F18A(FP466-00)	
P1	STRIPPED JACKET 51mm
L	SEMI-STRIPPED 12.7mm BLACK
N	SEMI-STRIPPED 12.7mm WHITE
E	SEMI-STRIPPED 12.7mm GREEN

2	UL SJT 18AWG x 3C, OD 7.8mm, JACKET COLOR SEE LIST, DRAWING No. EPSVT011803C-142	H5TC20-0304K09	1830mm	M304	
1	MOLDED PVC 35P, JACKET BLACK	H1BC02-0304K09		M304	
	TERMINAL WITH BRACKET: M87629LA-3PB	A1QC82-0257K09	1	M257	
No.	DESCRIPTION			Q'TY	Supplier

APPROVED	市場部 2022.12.02	 <p>SF Cable — 1-888-275-8755 —</p>	<p>Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm</p>		
CHECKED	屈飛霞				
DESIGNER	ZHU				
DRAWING	YN				
DATE	02/DEC/22	ITEM NO.	SF-PT18515-06	UNIT:mm	

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm