


Power Control Cable Unshielded 18 AWG / 2 Conductor

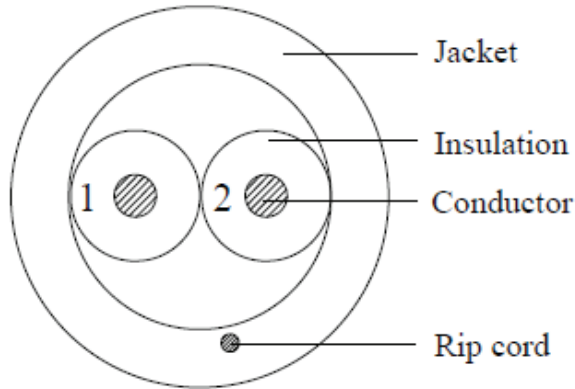

Description

18/2 Unshielded Solid Bare Copper CMR Control Cable

Physical Characteristics

| Conductor | | Bare Copper |
|-----------------------|----------|-------------|
| AWG | | 18 |
| Number of Conductors | | 2 |
| Number of Strands | | 7 |
| Diameter | (inches) | 0.0157 |
| Insulation | | PVC |
| Avg. Thickness | (inches) | 0.00984 |
| Min. Point Thickness | (inches) | 0.00866 |
| Diameter | (inches) | 0.0669 |
| Assembly Diameter | (inches) | 0.1338 |
| Jacket | | PVC |
| Avg. Thickness | (inches) | 0.0157 |
| Min. Point Thickness | (inches) | 0.01417 |
| Outer Diameter | (inches) | 0.1653 |
| Nominal Weight | (pounds) | 21 |

Colors

| | |
|-------------------|---------------|
| Insulation Colors | Black, Red |
| Jacket Color | Grey or White |

Part Numbers

| Part Number | Color | Put-up |
|-------------|-------|------------|
| | White | 1,000' Box |
| | Grey | 1,000' Box |

Cable Marking

**18AWG 2C UNSHIELDED CMR
FT4 TYPE XXXXXXXX C(ETL)US ****FT**