




Security Solid Cable 22 AWG / 4 Conductor

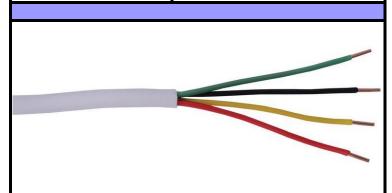

Description

22/4 Solid Bare Copper CMR Security Cable

Applicable Standards

- Class 2 Power Limited Circuit Cable and Communications
- Cable for General Purpose Applications

| Phys | ical Characteristic | .5 |
|--------------------------|---------------------|---------------|
| Conductor | | Bare Copper |
| Number of Conductors | | 4 |
| AWG | | 22 |
| | | |
| Insulation | | PVC |
| Avg. Thickness | (inches) | 0.006 |
| Insulated Conductor Dia. | (inches) | 0.037 |
| | | |
| Jacket | | FR-PVC |
| Avg. Thickness | (inches) | 0.014 |
| Overall Diameter | (inches) | 0.117 |
| | | |
| Nominal Weight 1000' | (pounds) | 14 |
| Nominal Weight 500' | (pounds) | 6 |
| | | |

| Insulation Colors | | Green, Rec | l, Black, Whit |
|-------------------|--------------|------------|----------------|
| | Part Numbers | | |
| Part Number | Color | | Put-up |
| | Grey | 1,000' | Вох |
| | White | 1,000' | Вох |

Cable Marking

White

500'

Coil Pack

22AWG 4 COND SOLID XXXXXX CMR FT4 C(ETL)US ****FT