




Security Stranded Cable 22 AWG / 4 Conductor

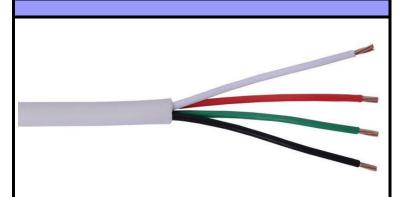

Description

22/4 Stranded Bare Copper CMR Security Cable

Applicable Standards

- Class 2 Power Limited Circuit Cable and Communications
- Cable for General Purpose Applications

•			
Phys	sical Characteri	stics	
Conductor		Stranded Bare Copper	
Number of Conductors		4	
AWG		22	
Insulation			PVC
	(in aboa)	0.006	
Avg. Thickness	(inches)		
Insulated Conductor Dia.	(inches)	0.041	
Jacket		FR-PVC	
Avg. Thickness	(inches)	0.014	
Overall Diameter	(inches)	0.126	
Nominal Weight	(pounds)	16	
- 	Colors		
Insulation Colors		Green, Red, Black, White	
	Part Numbers		
Part Number	Color		Put-up
	Grey	1,000'	Вох
	White	1,000'	Вох
Cable Marking			
22AWG 4 COND STRANDED XXXXXX CMR FT4 C(ETL)US ****FT			