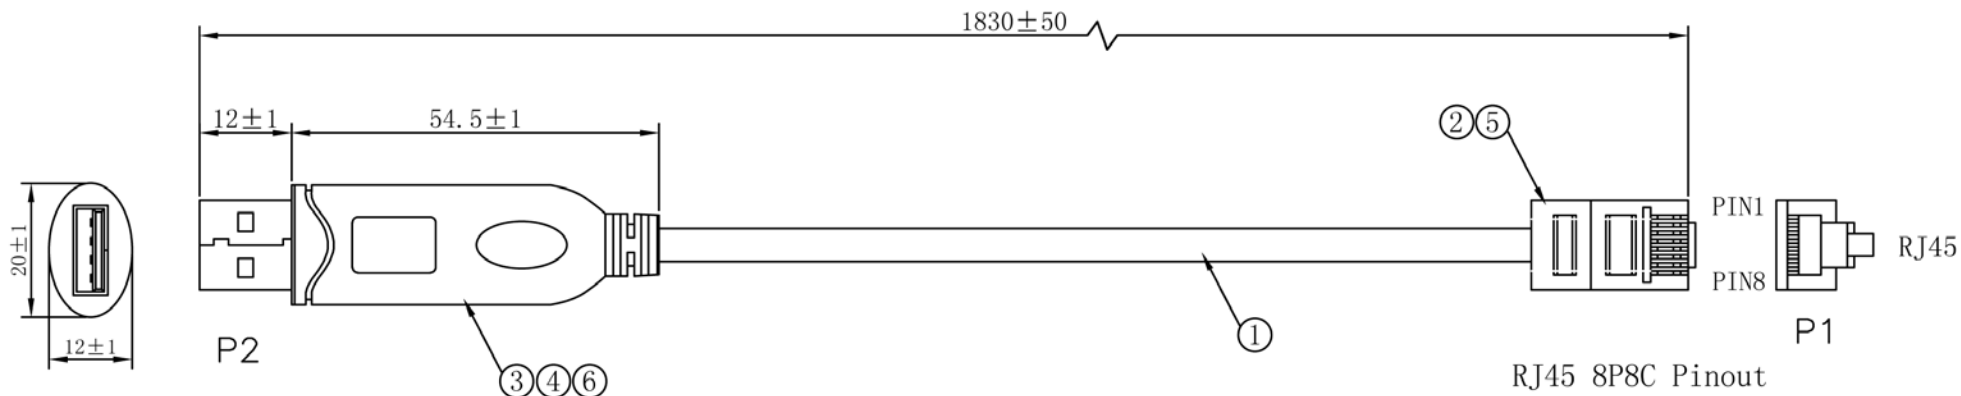


NOTE:
1.100%断路，开路，短路测试
2.导通阻抗小于3 ohm
3.绝缘阻抗大于2M ohm，300V
4.100% 功能测试。

P1	P2
PIN1	1 CTS
PIN2	2 DSR
PIN3	3 RXD
PIN4	4 GND
PIN5	5 GND
PIN6	6 TXD
PIN7	7 DTR
PIN8	8 RTS

6	塑胶	45P PVC, BLUE, 94V-1, MOLDED, ROHS	1	PCS
5	塑胶	LDPE, 本色, MOLDED, ROHS	A/R	G
4	插头	USB TYPE A MALE, PIN 镀金1u, ROHS	1	PCS
3	PCB板	PCBA WITH FT232+ZT213 CHIP, ROHS	1	PCS
2	连接器	RJ45 MALE, 8P8C, PIN 镀金1u, 透明PC水晶头	1	PCS
1	线材	28AWG*8C, BARE COPPER, BLUE PVC JACKET, ROHS	A/R	M
NO	NAME	Description	QTY	Unit

A	INITIAL RELEASE		13/03/02	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE		INCHES		M/M
.X	.015	.30	 SFCable — 1-888-275-8755 —	
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY		TONY CHAN	SCALE	NONE
CHECK BY			UNIT	MM
CUSTOMER, P/N:			SHEET	1/1
			DATE	22/12/6
			TITLE	USB TO RJ45
			P/N:	U2-AMRJ45-06