
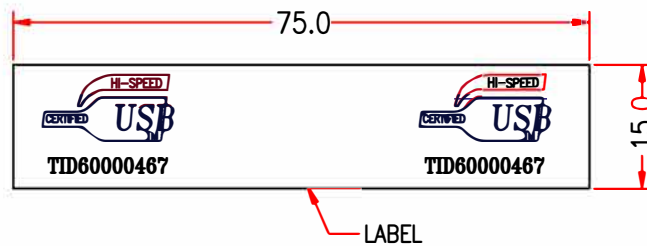


P1: M-942A

P2: M-945A

Customer No:

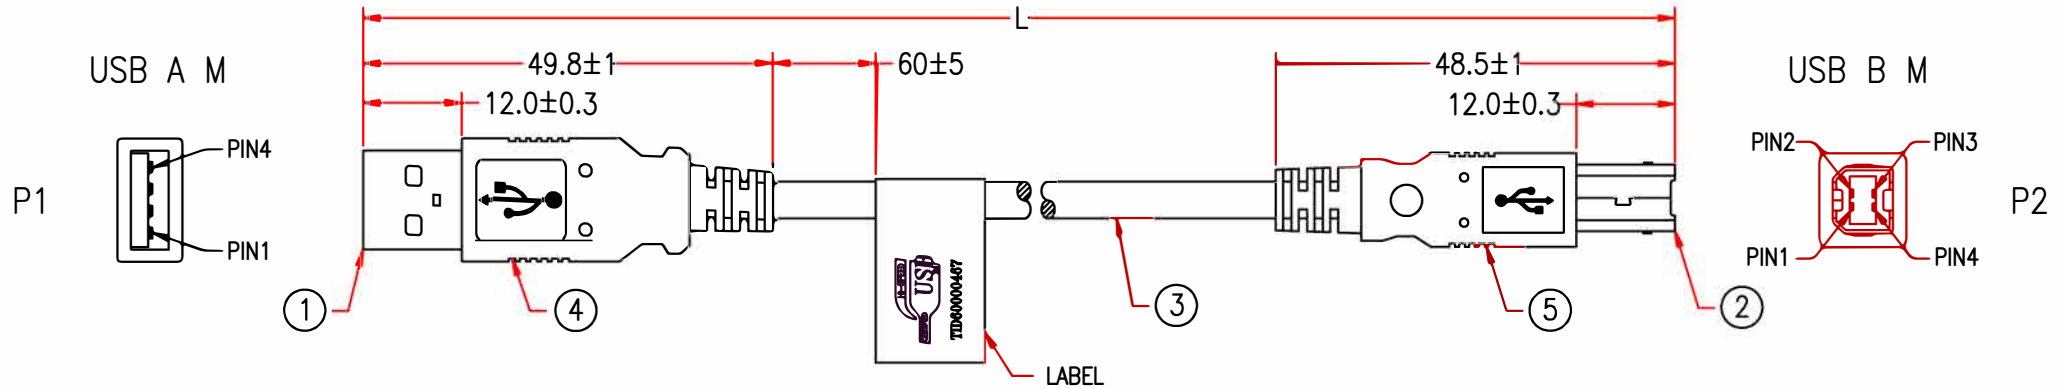

MARKING: ① ② ③ ④


HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1PR+24AWG/2C

E300060 兄 AWM 2725 80°C 30V VW-1

c兄 AWM E300060 I/II A/B 80°C 30V FT1 MSL-VN-

NOTE: All relevant materials are complied with RoHS directive .

5	MOLDED PVC	H1BF01-0304		M304
4	MOLDED PVC	H1BF01-0304		M304
③ 3	USB 2.0 CABLE, UL 2725 STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AMA BRAID, OD 4.5mm, DRAWING No.EUAB2801P2402C-422	H5KT03-0304	L-25mm	M304
2	USB B MALE 2.0, GOLD FLASH ON CONTACTS, WHITE INSULATOR, CRIMP FOUR PIECES TYPE	A1HB15-0454	1set	M454
1	USB A MALE 2.0, GOLD FLASH ON CONTACTS, WHITE INSULATOR, CRIMP TWO PIECES TYPE	A1HA22-0454	1set	M454

No.	DESCRIPTION		Q'TY	Supplier
APPROVED		 SFCable Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm		
CHECKED	HU			
DESINGER	XJW			
DRAWING	MuMu			
DATE	29/DEC/23	ITEM NO.	UB12-XX-BLK	
		UNIT:mm		

9461-47

P1	P2
1	1 RED 24#
2	2 WHITE
3	3 GREEN
4	4 BLACK 24#
SHIELD	SHIELD+BRAID

④ REV.4 2023.12.28

MODIFY MARKING

④ REV.2 2021.11.16

MODIFY MARKING

④ REV.3 2023.3.9

MODIFY MARKING

④ REV.1 2019.12.20

MODIFY CABLE, ADD MARKING

CHECKED