


P1: M-942A

P2: M-945A

Customer No: No.1

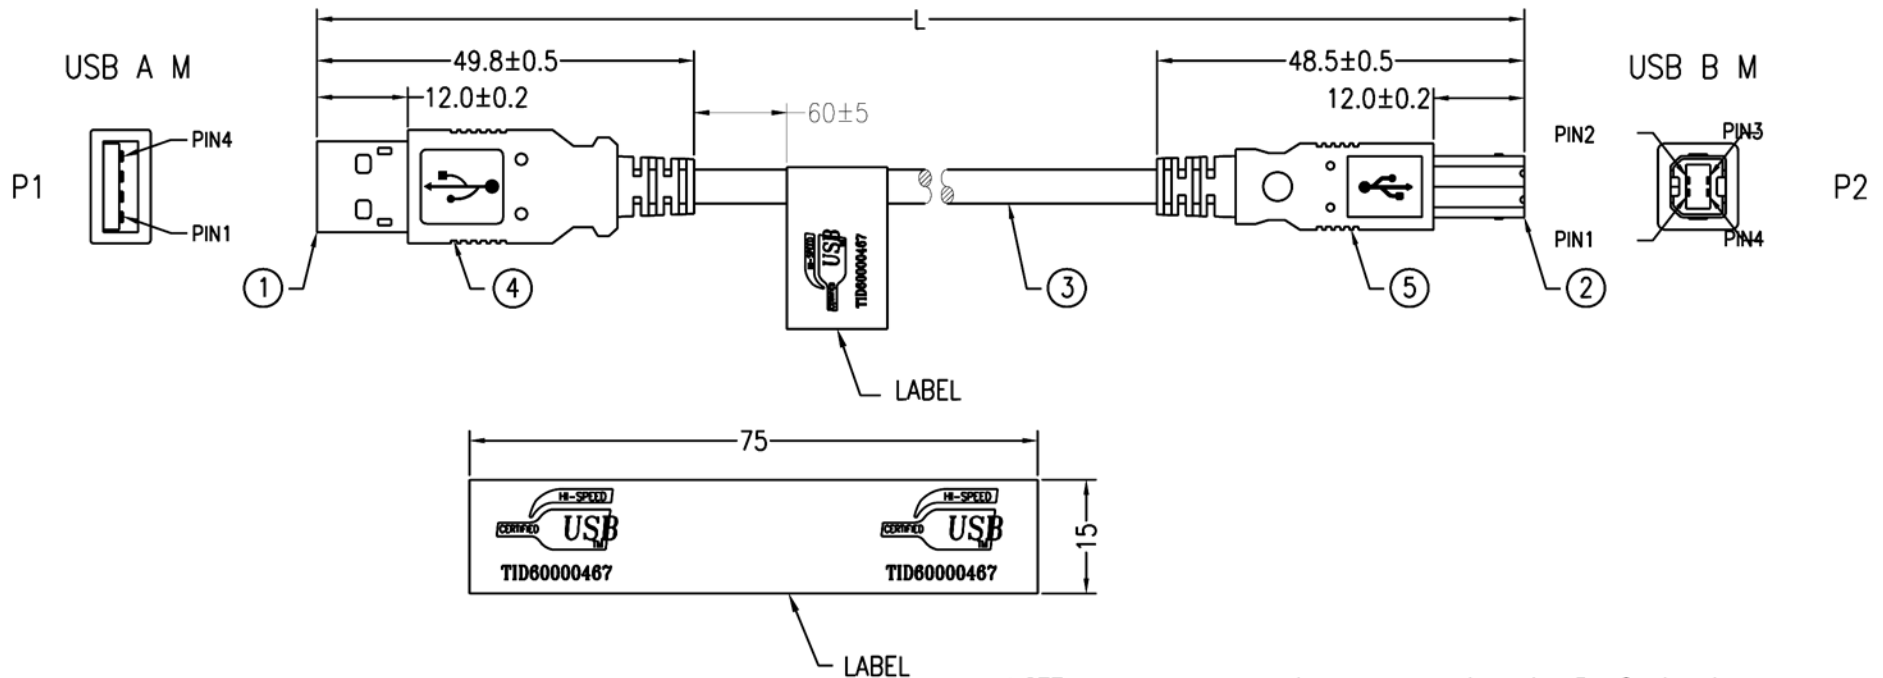

PIN ASSIGNMENT			
P1		P2	
1	—————	1	RED 24#
2	⌘	2	WHITE
3	⌘	3	GREEN
4	—————	4	BLACK 24#
SHIELD	—————	SHIELD+BRAID	

NOTE: All relevant materials are complied with RoHS directive .

5	MOLDED PVC BLACK		M304
4	MOLDED PVC BLACK		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, BRAID SHIELDING WITH DRAIN WIRE,OD 4.5mm,JACKET BLACK,DRAWING No.EUAB2801P2402C-139	L-25mm	M304
2	USB B MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	1set	M108
1	USB A MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	1set	M108
No.	DESCRIPTION	Q'TY	Supplier
APPROVED		SFCABLE.COM 1-888-275-8755 Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm† ±40mm	
CHECKED	TIAN		
DRAWING	LI		
DATE	28/AUG/08		
ITEM NO.	UB12-XX-BLK	UNIT:mm	