


P1: M-942A

P2: M-945A

Customer No: No.1

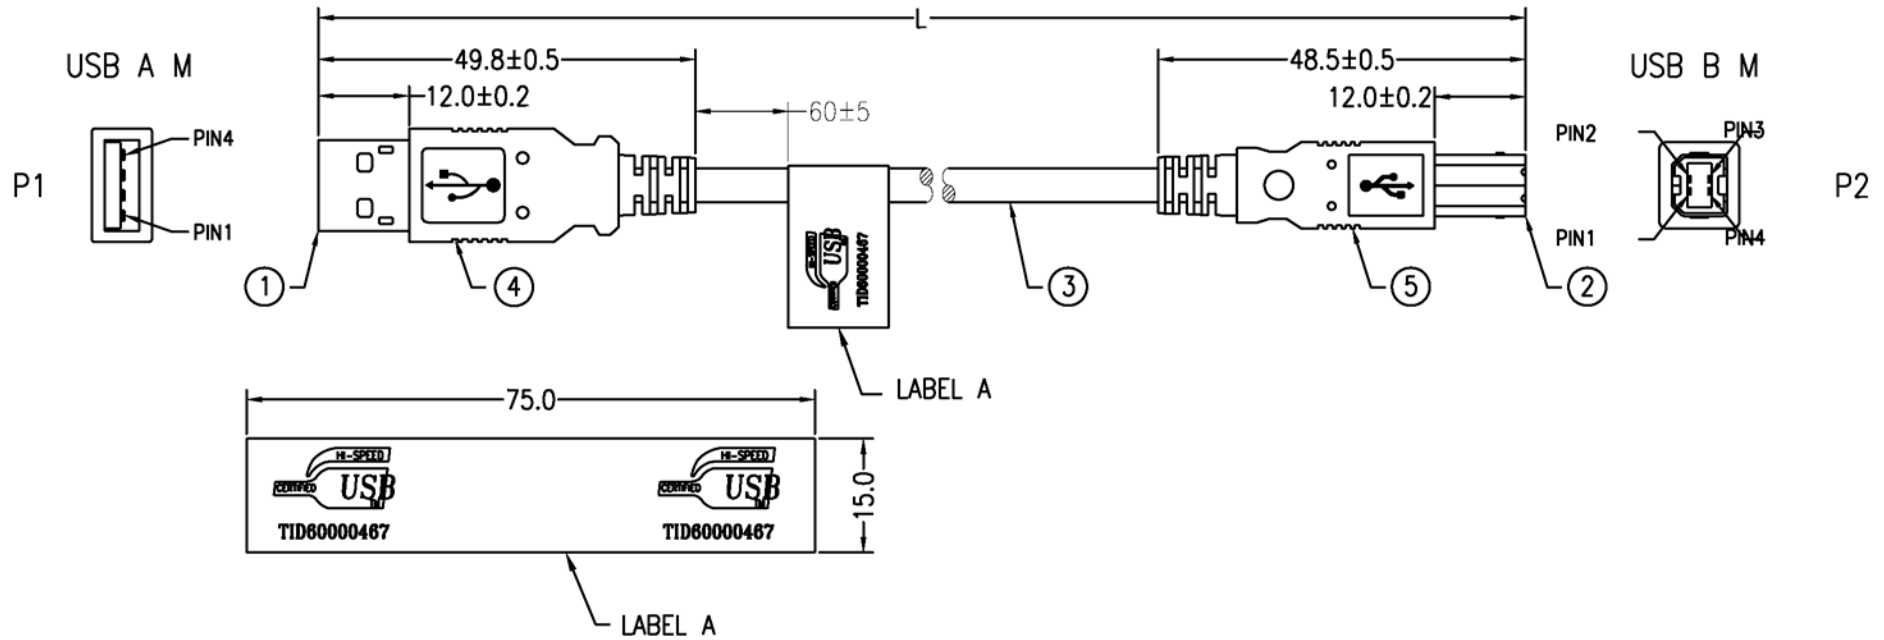

| <u>Pin Assignment</u> |               |
|-----------------------|---------------|
| P1                    | P2            |
| 1 —————               | 1 RED (24#)   |
| 2 ————                | 2 WHITE       |
| 3 ————                | 3 GREEN       |
| 4 —————               | 4 BLACK (24#) |
| SHIELD ————           | SHIELD        |

\*NOTE: All relevant materials are complied with RoHS directive .

|          |  |  |          |
|----------|--|--|----------|
| 5        | MOLDED PVC GRAY-WHITE(MZB7070)   |  | M304     |
| 4        | MOLDED PVC GRAY-WHITE(MZB7070)   |  | M304     |
| 3        | USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, BRAID SHIELDING WITH DRAIN WIRE,OD 4.5mm,JACKET GRAY-WHITE(MZB7070),DRAWING No.EUAB2801P2402C-139 | L-25mm   | M304     |
| 2        | USB B MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE  | 1set   | M108     |
| 1        | USB A MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE  | 1set   | M108     |
| No.      | DESCRIPTION  | Q'TY   | Supplier |
| APPROVED |  | <p><b>SFCABLE.COM</b><br/>1-888-275-8755</p> <p>Cable Length Unless Other Spec.<br/>Tolerances:<br/>0 ~200mm ±10mm<br/>201~1000mm ±20mm<br/>1001 ~1500mm ±25mm</p> |          |
| CHECKED  | TIAN   |  |          |