


P1: M-942C

Customer No:

P2:

M-Y928A

M-928A

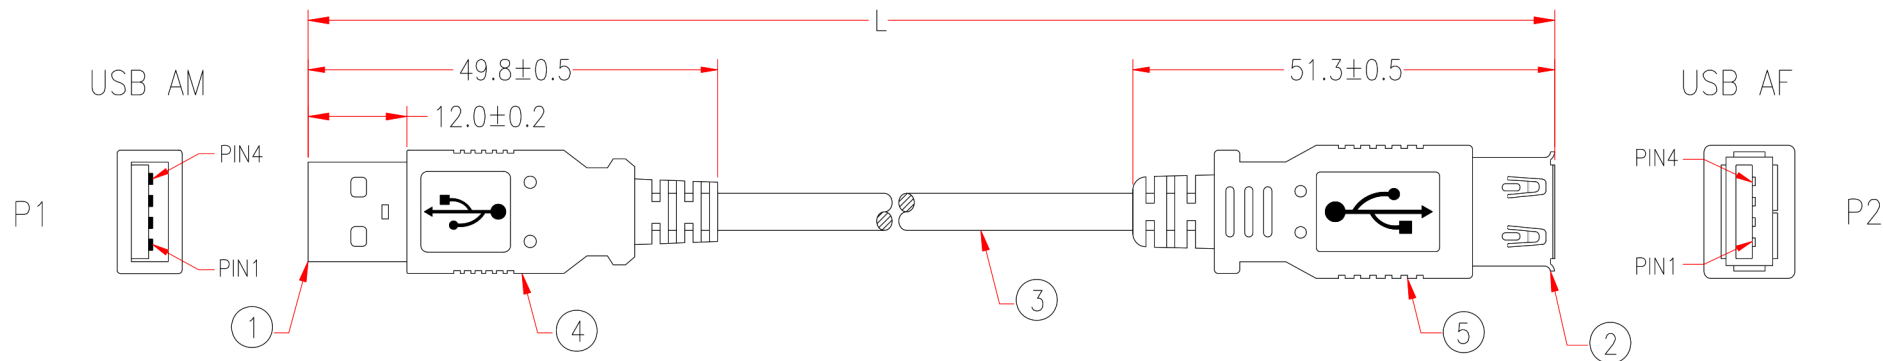

9466-18			
P1		P2	
1	—————	1	RED 24#
2	~~~~~	2	WHITE
3	~~~~~	3	GREEN
4	—————	4	BLACK 24#
SHIELD	—————	SHIELD	

NOTE: All relevant materials are complied with RoHS directive .

5	BLACK HEAT SHIRK TUBE ϕ 1.0*10mm	A4HA23-0959	1	M959
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304B01		M304
4	MOLDED PVC BLACK	H1BF01-0304B01		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, AMA BRAID OD 4.5mm, JACKET BLACK , DRAWING No.EUAB2801P2402C-139	H5KH29-0304B01	L-20mm	M304
2	USB A FEMALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR	A1HC03-0432	1	M432
1	USB A MALE, GOLD FLASH ON CONTACTS, WHITE INSULATOR, CRIMP TWO PIECES TYPE	A1HA22-0454	1SET	M454
No.	DESCRIPTION		Q'TY	Supplier



APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm	
CHECKED	HU			
DRAWING	JIANG			
DATE	20/NOV/14			
ITEM NO.	UB13-XX-BLK		UNIT:mm	