
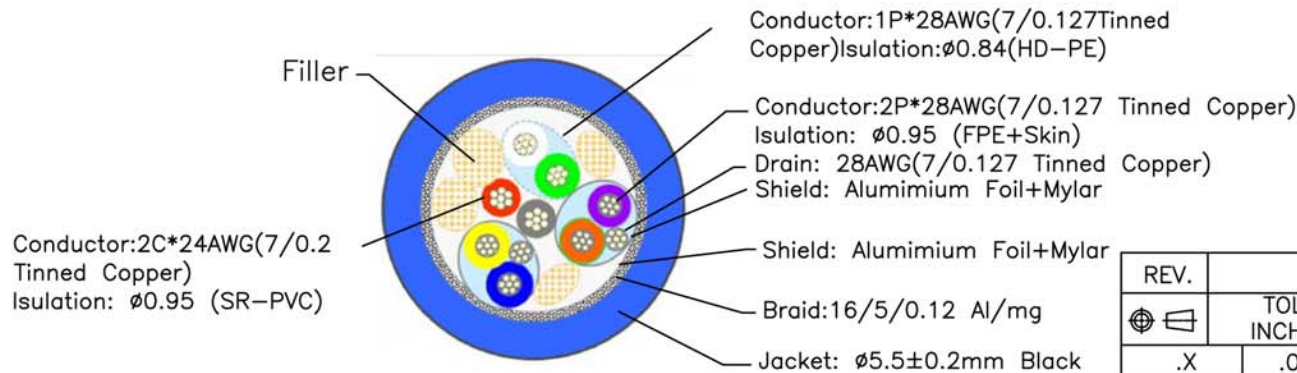


Electrical Test:

1. 100%Test(Open, short, miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 10M ohm min.
4. Hi-pot: 300V DC/10ms

Pin Assignment

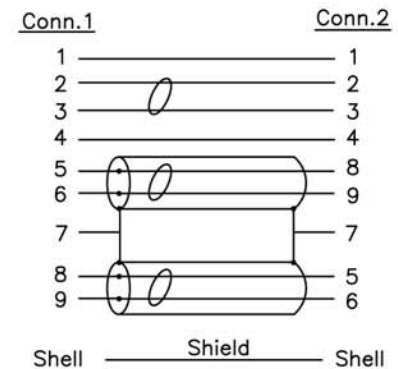

REV.	DESCRIPTION			DATE	
⊕ ⊖	TOLERANCE INCHES M/M			 TITLE: USB 3.0 AM TO AM Cable	
.X	.015	.30			
.XX	.010	.10			
.XXX	.005	.05			
DRAWN BY	Henry			CUSTOMER : CUSTOMER NO.:	
CHECK BY		SCALE	NONE	DRAWING NO.:	
APPD BY		UNIT	MM		REV. A
		DATE	10.09.02	USB3-AA-15	1/1

NO.	DESCRIPTION	Q'TY	UNIT
③	Outside Molding: 45P PVC Color: Black	16	g
②	USB 3.0 A Type M Pin Gold Plated, Shell Nickel, Blue Insulation	2	Set
①	Super High Speed USB 3.0 Cable UL2725 (7/0.127T*1P+AL+D+MY)*2C+7/0.127T*1P+7/0.2T*2C+AL+MY+DW+BD OD:5.5±0.2mm Color: Black	L	M