



Tabel:

Length	Part No.
915±30mm	10
1830±40mm	
3050±50mm	

Electrical Test:

- 100% Test (Open, short, miss wire)
- Contact Resistance: 2 ohm max.
- Insulation Resistance: 10M ohm min.
- Hi-pot: 300V DC/10ms

Pin Assignment

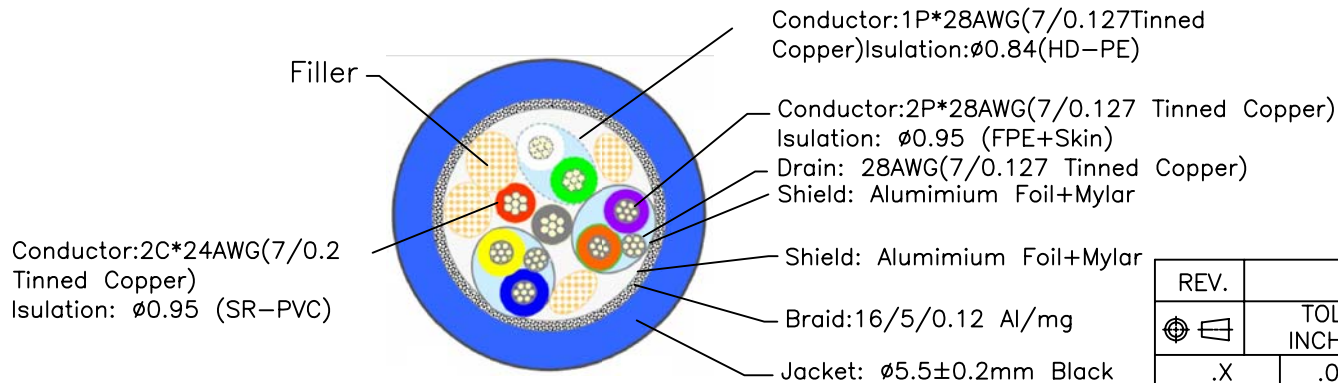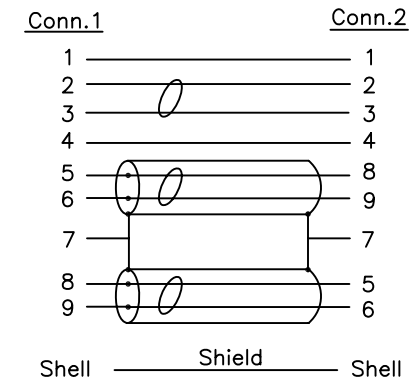

REV.	DESCRIPTION		DATE
	TOLERANCE INCHES M/M		
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	TITLE: USB 3.0 AM TO AM Cable
DRAWN BY	Henry		CUSTOMER : CUSTOMER NO.: USB3-AA-XX
CHECK BY			SCALE NONE UNIT MM DRAWING NO.:
APPD BY			DATE 10.09.02 REV. A 1/1

NO.	DESCRIPTION	Q'TY	UNIT
③	Outside Molding: 45P PVC Color: Black	16	g
②	USB 3.0 A Type M Pin Gold Plated, Shell Nickel, Blue Insulation	2	Set
①	Super High Speed USB 3.0 Cable UL2725 (7/0.127T*1P+AL+D+MY)*2C+7/0.127T*1P+7/0.2T*2C+AL+MY+DW+BD OD:5.5±0.2mm Color: Black	L	M