


LENGTH(L)
3FT (915mm)
6FT (1830mm)
10FT (3048mm)
15FT (4572mm)

NOTE: All relevant materials are complied with RoHS directive .

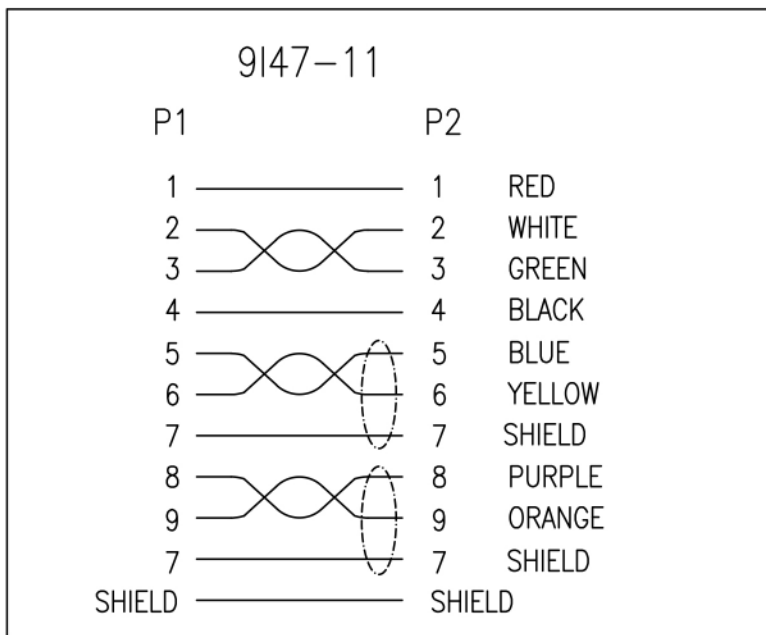

5	BLACK HEAT SHRINK TUBE ϕ 1.0*4mm	A4HA23-0959	1	M959
	BLACK HEAT SHRINK TUBE ϕ 2.0*8mm	A4HA09-0959	2	M959
	MOLDED PVC BLACK	H1BF01-0304K09		M304
4	BLACK HEAT SHRINK TUBE ϕ 1.0*4mm	A4HA23-0959	1	M959
	BLACK HEAT SHRINK TUBE ϕ 2.0*8mm	A4HA09-0959	2	M959
	MOLDED PVC BLACK	H1BF01-0304K09		M304
3	USB 3.0 CABLE, 28AWG*1PAIR+(28AWG*1PAIR+D+F-AL)*2PCS +24AWG*2C+AMA BRAID(85%), OD 5.8mm JACKET BLACK, DRAWING NO. EUAB2801P2802P2402C-333	H5KS02-0304K09	L-20mm	M304
2	USB B MALE 3.0, GOLD FLASH ON CONTACTS BLUE INSULATOR, SHORT TYPE	A1HB52-0454	1set	M454
1	USB A MALE 3.0, GOLD FLASH ON CONTACTS BLUE INSULATOR, SHORT TYPE	A1HA48-0454	1set	M454
No.	DESCRIPTION		Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm \pm 10mm 201~1000mm \pm 20mm 1001 ~1500mm \pm 25mm 1501~2100mm \pm 30mm 2100mm \uparrow \pm 40mm
CHECKED	HU		
DESIGNER	JIANG		
DRAWING	ZHU		
DATE	30/OCT/20		
ITEM NO.	USB3-AB-XX	UNIT:mm	