



P1	M-Y1219A	Customer No:
	M-1219A	
P2	M-Y1220A	
	M-1220A	

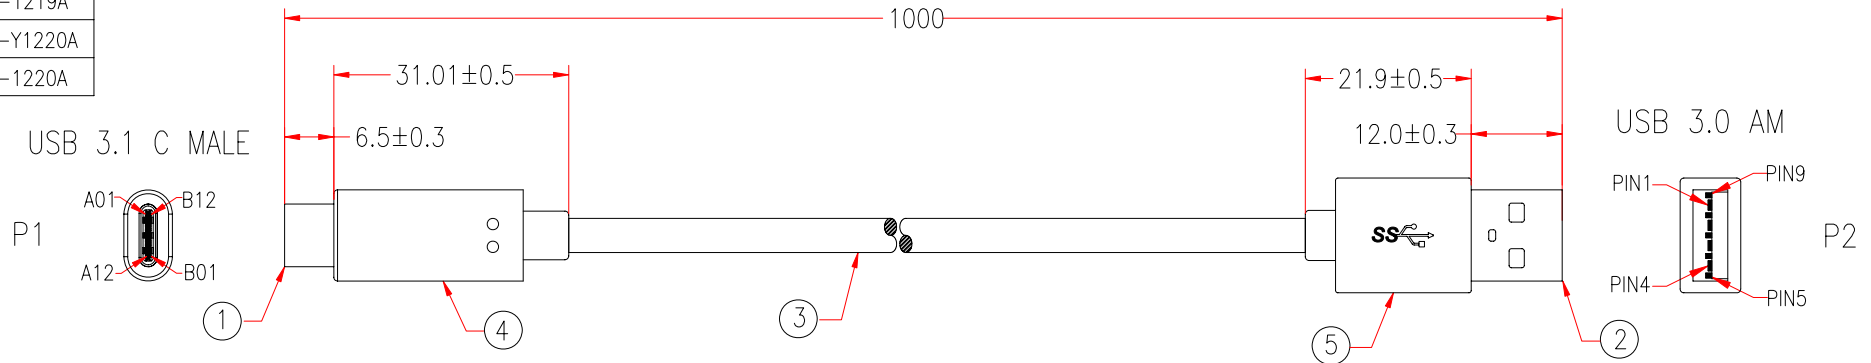

NOTE: All relevant materials are complied with RoHS directive .

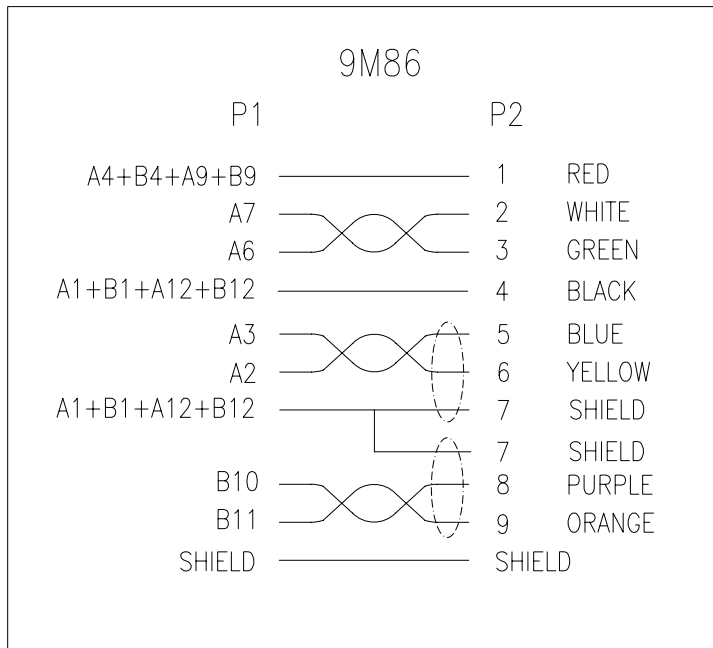

5	BLACK HEAT SHRINK TUBE $\phi$ 1.0*8mm	A4HA23-0959	2	M959
	BLACK HEAT SHRINK TUBE $\phi$ 2.0*4mm	A4HA09-0959	2	M959
	COPPER FOIL 17*35mm	A6LA04-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
	MOLDED PVC BLACK	H1BF01-0304K09		M304
4	BLACK HEAT SHRINK TUBE $\phi$ 1.0*8mm	A4HA23-0959	2	M959
	BLACK HEAT SHRINK TUBE $\phi$ 2.0*4mm	A4HA09-0959	2	M959
	COPPER FOIL 17*35mm	A6LA04-0309	1	M309
	MOLDED PE COLOR TRANSPARENT	A5BA02-0280		M280
3	MOLDED PVC BLACK	H1BF01-0304K09		M304
	USB 3.0 CABLE, 32AWG*1PAIR+(32AWG*2PAIR+D+AML)*2PCS 26AWG*2C+COPPER BRAID(70%), OD 4.5mm, JACKET BLACK, DRAWING NO. EUAB3201P3202P2602C-666	H5KS18-0304K09	980mm	M304
2	USB A MALE 3.0, GOLD FLASH ON CONTACTS, BLUE INSULATOR, SHORT A PIECE TYPE	A1HA79-0846	1	M846
1	USB C MALE 3.1, GOLD FLASH ON CONTACTS, WITH PCB, BLACK INSULATOR, RESISTANCE 56K ohm & CAPACITOR 10nF	A1HH33-0001	1SET	M001
No.	DESCRIPTION		Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm$ 10mm 201~1000mm $\pm$ 20mm 1001 ~1500mm $\pm$ 25mm 1501~2100mm $\pm$ 30mm 2100mm $\uparrow$ $\pm$ 40mm
CHECKED	HU		
DRAWING	LIU		
DATE	15/AUG/16		
ITEM NO.	USB3-AC-01	UNIT:mm	

	CHECKED	
--	---------	--