


P1,P2:	M-Y1387B	⚠
	M-1219A	

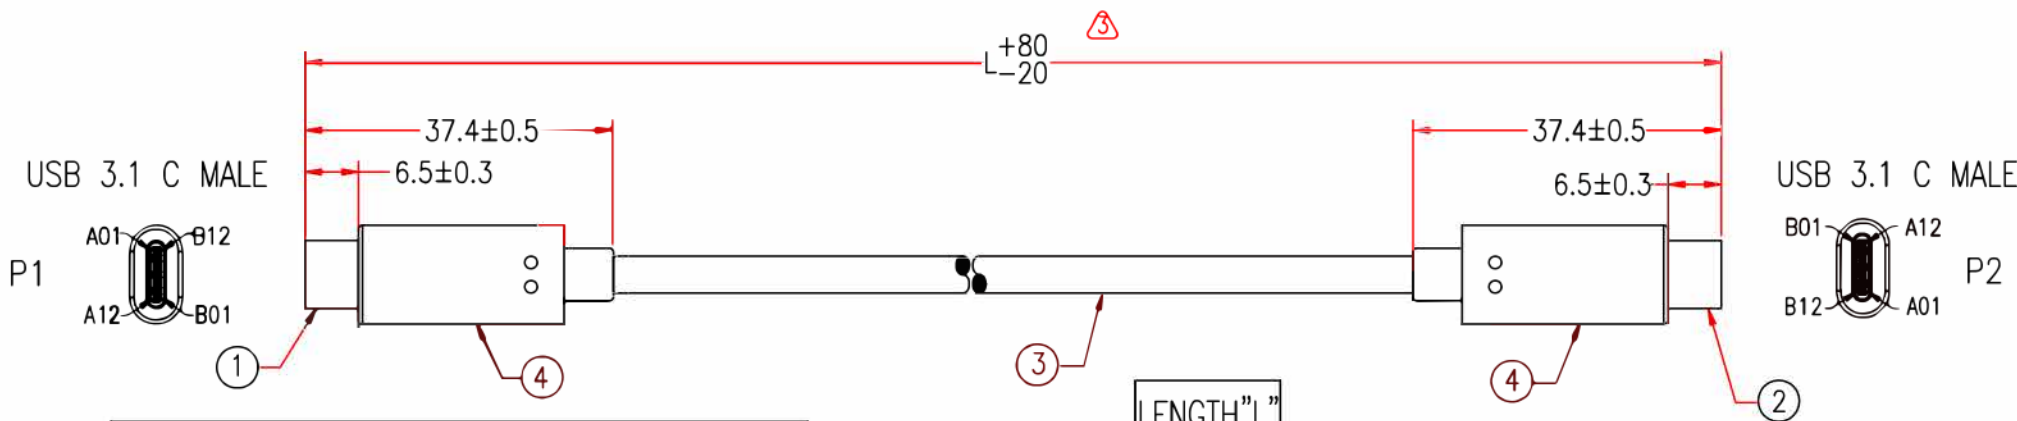

LENGTH "L"
500
1000

9M76-1	
P1	P2
A1+B1+A12+B12	A1+B1+A12+B12 ALL DRAIN
A4+B4+A9+B9	A4+B4+A9+B9 RED+BLACK #24*2
A2	B11 ORANGE
A3 BLUE AL/MY	B10 PURPLE
A5	A5 BLUE
A6	A6 GREEN
A7	A7 WHITE
A8	B8 YELLOW
A10	B3 PURPLE
A11 SILVER AL/MY	B2 ORANGE
B2 BLUE AL/MY	A11 YELLOW
B3	A10 BLUE
B5	B5 ORANGE
B8	A8 PURPLE ⚠
B10	A3 BLUE
B11 SILVER AL/MY	A2 YELLOW ⚠
SHIELD	SHIELD

* NOTE: All relevant materials are complied with RoHS directive .

4	USB C MALE 3.1 TINPLATE (P/N:4.0206.045 & 4.0206.046)	A6GE19-0636	2SET	M636
	USB C MALE 3.1 WIRE CLAMP (P/N:C-5.0301.043)	A6GC13-0636	2	M636
	COPPER FOIL 5*25mm ⚠	A6LA17-0523	2	M523
	MOLDED PP COLOR TRANSPARENT	A5BB02-5555		M5555
	MOLDED PVC BLACK	H1BF01-0304W07		M304
3	UL2725 (1P*32#+D+AL+MYLAR)*4C+1P*32#+4C*32#+2C*24#+AL+D+B, OD4.5mm, JACKET BLACK, DRAWING No. EUAB3204P3201P3204C2402C-953	H5KY04-0304W07	L+60mm	M304
2	USB C MALE 3.1, GOLD FLASH ON CONTACTS, WITH PCB(IC), BLACK INSULATOR, CAPACITOR 10nF (P/N:1.0103.275, PCB NO: CL0154)	A1HH37-0636	1	M636
1	USB C MALE 3.1, GOLD FLASH ON CONTACTS, WITH PCB, BLACK INSULATOR, CAPACITOR 10nF (P/N:1.0103.276, PCB NO: CL0155)	A1HH38-0636	1	M636
No.	DESCRIPTION	Q'TY	Supplier	

⚠ REV.8 2020.12.28	ADD LENGTH		
⚠ REV.6 2019.09.04	MODIFY COLOR & MODEL NUMBER	⚠ REV.7 2020.04.21	MODIFY THE WIRE CLAMP MANUFACTURER
⚠ REV.4 2019.07.22	MODIFY CABLE	⚠ REV.5 2019.07.25	MODIFY COLOR
⚠ REV.3 2019.06.28	MODIFY CABLE LENGTH TOLERANCE & PLUG SUPPLIER & TINPLATE		
⚠ REV.2 2019.02.21	MODIFY CABLE DESCRIPTION, ADD COPPER FOIL		
⚠ REV.1 2018.11.22	MODIFY TINPLATE MATERIAL NUMBER	CHECKED	

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DESIGNER	JIANG		
DRAWING	ZHU		
DATE	28/DEC/20		
ITEM NO.	USB3-CC-01	UNIT:mm	