




11.75(MIN)

$L \pm Tmm$

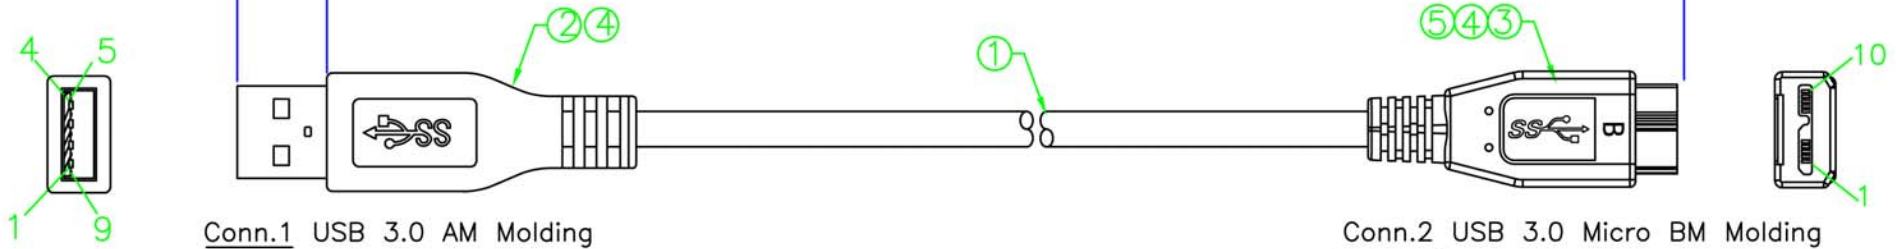

Conn.1 USB 3.0 AM Molding

Conn.2 USB 3.0 Micro BM Molding

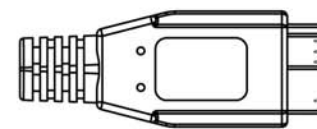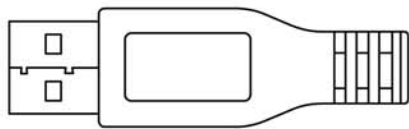


Tabel:

Length	Part No.
915±30mm	10U3-30124-03
1830±40mm	10U3-30124-06
3050±50mm	10U3-30124-10
4575±50mm	10U3-30124-15


Electrical Test:

- 100%Test(Open, short, miss wire)
- Contact Resistance: 2 ohm max.
- Insulation Resistance: 10M ohm min.
- Hi-pot: 300V DC/10ms

PIN Assignment

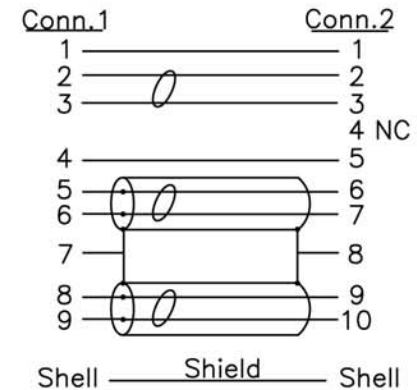

Filler



Conductor:1P*28AWG(7/0.127Tinned Copper)Isulation:ø0.84(HD-PE)

Conductor:2P*28AWG(7/0.127 Tinned Copper)
Isulation: ø0.95 (FPE+Skin)
Drain: 28AWG(7/0.127 Tinned Copper)
Shield: Alumimium Foil+Mylar

Shield: Alumimium Foil+Mylar

Braid:16/5/0.12 Al/mg

Jacket:ø5.5±0.2mm Black

Conductor:2C*24AWG(7/0.2 Tinned Copper)
Isulation: ø0.95 (SR-PVC)

REV.	DESCRIPTION			DATE
⑤	TITLE: USB 3.0 AM TO Micro B Cable			
④	CUSTOMER :			
③	CUSTOMER NO.:			
②	SCALE	NONE	DRAWING NO.:	REV. A
①	UNIT	MM	USB3-MICRO-XX	1/1
	DATE	10.09.02		

NO.	DESCRIPTION	Q'TY	UNIT
⑤	Inside Molding: PE	3	g
④	Outside Molding: 45P PVC Color: Black	16	g
③	USB 3.0 Micro B, Pin Gold Plated, Shell Nickel, Black Insulation	1	Set
②	USB 3.0 A Type M Pin Gold Plated, Shell Nickel, Blue Insulation	1	Set
①	Super High Speed USB 3.0 Cable: UL2725 (7/0.127T*1P+AL+D+MY)*2C+7/0.127T*1P+7/0.2T*2C+AL+MY+DW+BD OD:5.5±0.2mm Color: Black	L	M