


P1:	M-Y536A
	M-536A
P2:	M-780A

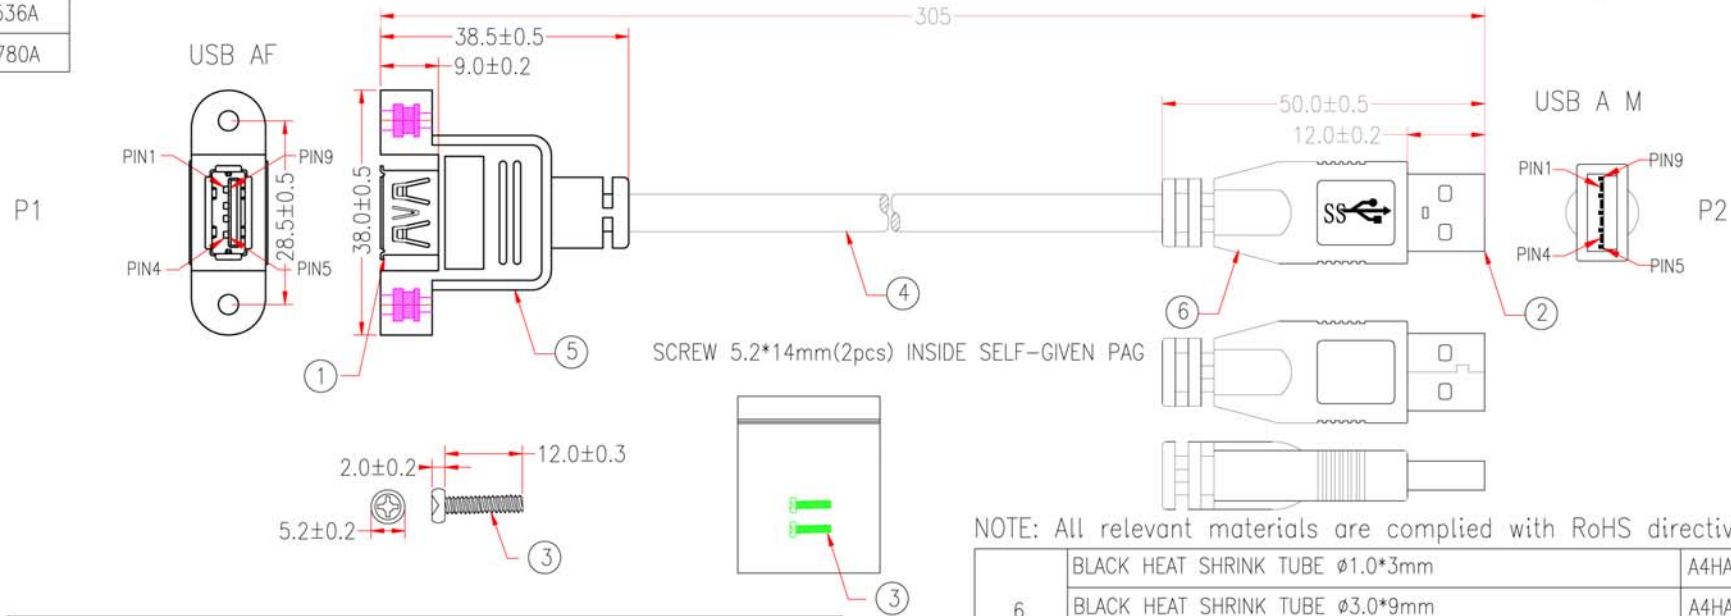

SCREW 5.2*14mm(2pcs) INSIDE SELF-GIVEN PAG

NOTE: All relevant materials are complied with RoHS directive .

9J50-5

P1		P2	
1	—	1	RED
2	—	2	WHITE
3	—	3	GREEN
4	—	4	BLACK
5	—	5	BLUE
6	—	6	YELLOW
7	—	7	SHIELD
8	—	8	PURPLE
9	—	9	ORANGE
7	—	7	SHIELD
SHIELD	—	SHIELD	

No.	DESCRIPTION	Q'TY	Supplier
6	BLACK HEAT SHRINK TUBE ϕ 1.0*3mm	1	M959
	BLACK HEAT SHRINK TUBE ϕ 3.0*9mm	2	M959
	MOLDED PVC BLACK		M304
5	NON-UL 24AWG INSULATOR WIRE, LENGTH 20mm, JACKET ORANGE, DRAWING No. EH002401C-028	1	M304
	BLACK HEAT SHRINK TUBE ϕ 1.0*10mm	1	M959
	BLACK HEAT SHRINK TUBE ϕ 3.0*9mm	2	M959
	HEX-NUT 5*4.0mm, #4-40	2	M95
	ALUMINUM FOIL 25*65mm	1	M579
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BLACK		M304
4	USB 3.0 CABLE,28AWG*1PAIR+(28AWG*1PAIR+D+F-AL)*2PCS+24AWG*2C+AMA BRAID,OD 5.8mm JACKET BLACK, DRAWING NO. EUAB2801P2802P2402C-333	285mm	M304
3	SCREW 5.2*14mm, 4-40#	2	M95
2	USB A MALE 3.0, GOLD FLASH ON CONTACTS, BLUE INSULATOR, SHORT TYPE	1	M656
1	USB A FEMALE 3.0, GOLD FLASH ON CONTACTS, BLUE INSULATION	1	M432

APPROVED	2014.11.14	<p>1-888-275-8755</p>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	陳瑞雯		
DRAWING	ZHU		
DATE	23/OCT/14	ITEM NO.	USB3-PM-MF-XX

CHECKED

