


P1,P2: M-Y125B
M-125E
P3: M-487A

Customer No: No.:1

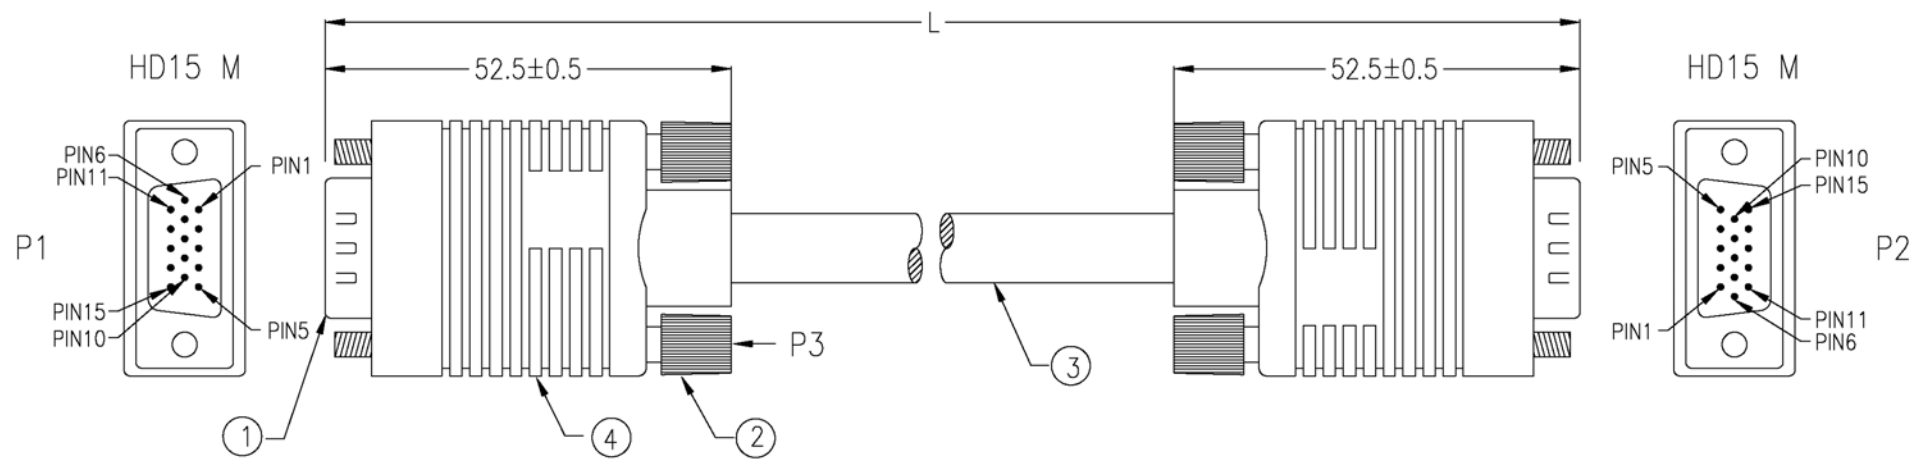

PIN ASSIGNMENT

P1	P2	
1	1	RED CONDUCTOR
6	6	RED SHIELD
2	2	GREEN CONDUCTOR
7	7	GREEN SHIELD
3	3	BLUE CONDUCTOR
8	8	BLUE SHIELD
4	4	BROWN
14	14	BROWN/WHITE
5	5	RED
12	12	RED/WHITE
9	9	YELLOW
10	10	ORANGE
13	13	ORANGE/WHITE
11	11	BLACK
15	15	BLACK/WHITE
SHIELD	SHIELD	

* NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
4	BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$	2	M304
	BLACK HEAT SHRINK TUBE $\phi 3.0 \times 10\text{mm}$	6	M743
	BLACK HEAT SHRINK TUBE $\phi 1.5 \times 10\text{mm}$	6	M743
	COPPER FOIL 33*65mm	2	M309
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BLACK		M304
3	UL2919 {[28AWG+AL+S(29/0.10mmTS)]*3COAXIAL+(28AWG*4.5P)};AL+D+AMA BRAID(47%), OD:9.0mm, JACKET BLACK GROOVE, DRAWING No.EAAB2803T2804P2801C-197	L-20mm	M304
2	MOLDED THUMBSCREW #4-40, LENGTH 48mm, BLACK	4	M95
1	HD15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	2	M108
No.	DESCRIPTION	Q'TY	Supplier

APPROVED		SFCABLE.COM 1-888-275-8755	Cable Length Unless Other Spec. Tolerances: 0 ~200mm $\pm 10\text{mm}$ 201~1000mm $\pm 20\text{mm}$ 1001 ~1500mm $\pm 25\text{mm}$ 1501~2100mm $\pm 30\text{mm}$ 2100mm \uparrow $\pm 40\text{mm}$
CHECKED	TIAN		
DRAWING	XIANG		
DATE	28/DEC/07		
ITEM NO.	VG10-XXNF	UNIT:mm	