


P1,P2:	M-Y125B
	M-125E
P3:	M-487A
P4:	M-323D

Customer No: No. 1

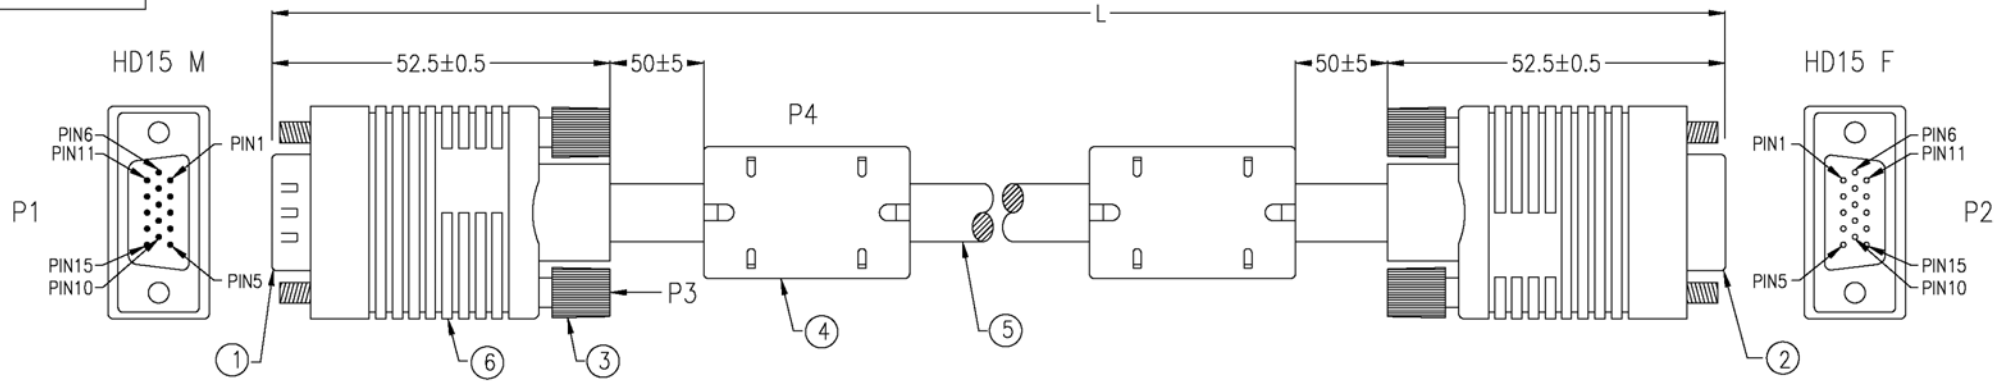

\* NOTE: All relevant materials are complied with RoHS directive .

PIN ASSIGNMENT	
P1	P2
1	1 RED CONDUCTOR
6	6 RED SHIELD
2	2 GREEN CONDUCTOR
7	7 GREEN SHIELD
3	3 BLUE CONDUCTOR
8	8 BLUE SHIELD
4	4 BROWN
14	14 BROWN/WHITE
5	5 RED
12	12 RED/WHITE
9	9 YELLOW
10	10 ORANGE
13	13 ORANGE/WHITE
11	11 BLACK
15	15 BLACK/WHITE
SHIELD	SHIELD

No.	DESCRIPTION	Q'TY	Supplier
6	BLACK PVC TUBE $\phi$ 3.0*22mm	2	M304
	BLACK HEAT SHRINK TUBE $\phi$ 3.0*10mm	6	M743
	BLACK HEAT SHRINK TUBE $\phi$ 1.5*10mm	6	M743
	COPPER FOIL 33*65mm	2	M309
	MOLDED PE COLOR TRANSPARENT		TWN
	MOLDED PVC BLACK		M304
5	UL2919 {[28AWG+AL+S(29/0.10mmTS)]*3COAXIAL+(28AWG*4.5P)};AL+D+AMA BRAID(47%), OD:9.0mm, JACKET BLACK GROOVE, DRAWING No.EAAB2803T2804P2801C-197	L-20mm	M304
4	FERRITE CORE 17.5*10.5*28.5mm	2	M113
	MOLDED PVC BLACK		M304
3	MOLDED THUMBSCREW #4-40, LENGTH 48mm, BLACK	4	M95
2	HD15 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
1	HD15 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108

APPROVED		<b>SFCABLE.COM</b> <b>1-888-275-8755</b>	Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm		
CHECKED	TIAN				
DRAWING	XIANG				
DATE	28/DEC/07	ITEM NO.	<b>VG20-XX</b>	UNIT:mm	