
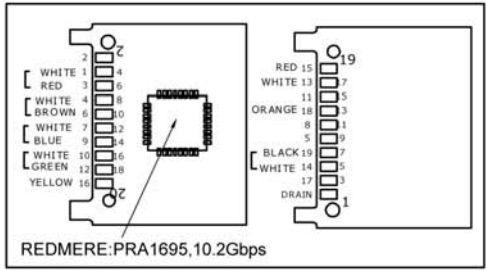
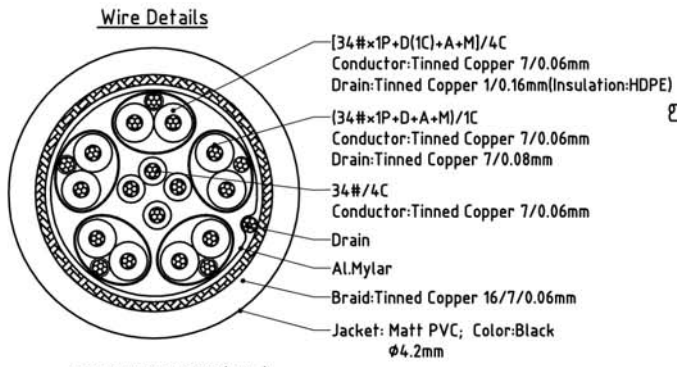


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD


REVISION INFORMATION			
Rev.	Rev.Date	Modified By	Brief Description
1.0	2015-4-1	Pillar	Change the cable spec

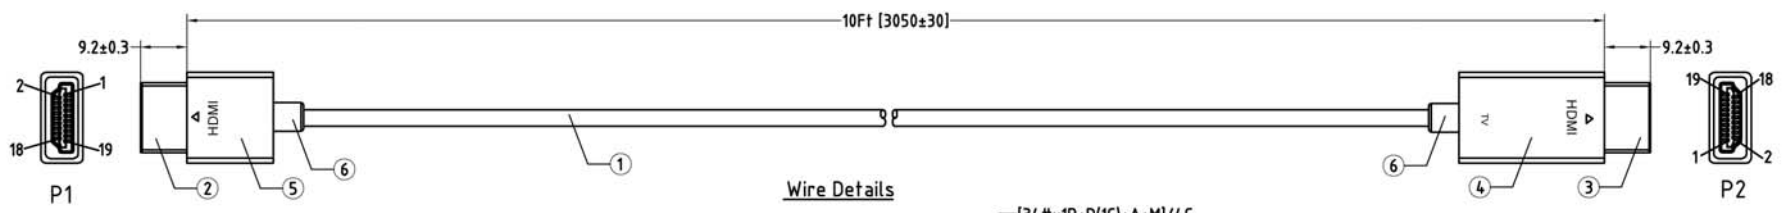


PIN ASSIGNMENT(1.4v)

P1		P2
3	红	Red
1	白	White
2	地	Drain
6	棕	Brown
4	白	White
5	地	Drain
9	蓝	Blue
7	白	White
8	地	Drain
12	绿	Green
10	白	White
11	地	Drain
19	黑	Black
14	白	White
17	地	Drain
13	白	White
15	红	Red
16	黄	Yellow
18	橙	Orange
SHELL	编织	Braid

Electrical character:  
1)100% 1080P、3D、4K testing



Label:  
Size:60 x 40 mm



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑥	SR MOLDING	PVC,45Pa,Black		
⑤	HOOD	HDMI A Male Hood:Black,ABS		
④	HOOD	HDMI A Male Hood(with Redmere):Black,ABS		
③	PCBA+CONN	PCBA(Redmre 1695)+HDMI A/M( Pin G/F,Black Insulation,Gold Plated)		
②	HDMI_Conn	HDMI A/M,PIN G/F,Black Insulation,Steel-Shell(G/F Plated),Solder type		
①	Cable	UL20276[34#/1P+D(1C)+A+M]/4C+(34#/1P+D+A+M)/1C+34#/4C+A+D+B(16/7/0.06TC),OD:4.2mm,Jacket: Black PVC		

DRAWN BY	DATE: 2015/4/1	DESCRIPTION: HDMI AM TO AM Cable(Redmere),10FT
CHECKED BY	SHEET 1 of 1	ITEM NO. <b>1813-SF-12</b>
APPROVED BY	SCALE None	REV. 1.0

UNIT: mm