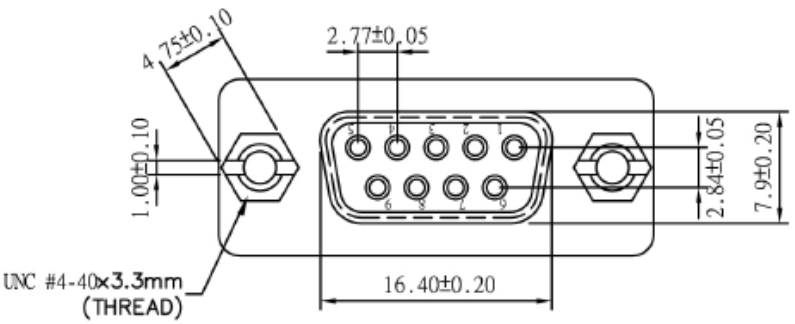

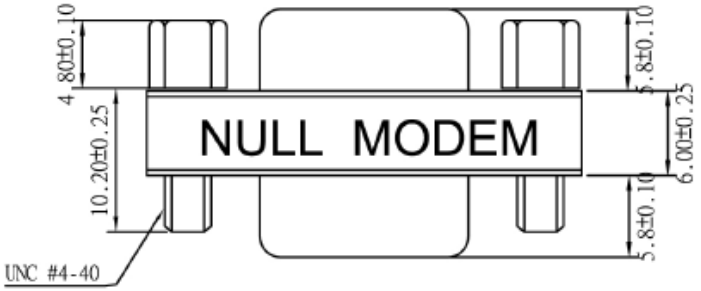

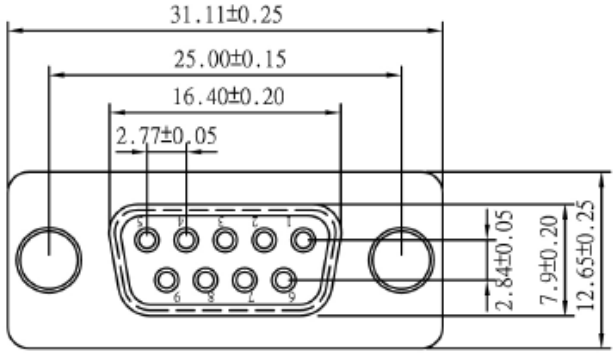

UNC #4-40 Hexscrew



MA 005D (DB9F/F ADAPTOR)

PIN OUT: 09Female 09Female

2	----------	3
3	----------	2
4	----------	1
	----------	6
5	----------	5
1	----------	4
6	----------	
7	----------	8
8	----------	7
G	----------	G

Label:Orange color with white character
One side: NULL MODEM
The other side: MINI ADAPTER
SPECIFICATION
INSULATOR:PBT Glass fibre reinforced UL 94 VO(black)
CONTACT:Brass
CONTACT PLATING:Gold plated over nickel
SHELL: Tin plated shell

				Edition A3	SFCable.com					
				SCALE 2:1	UNLESS OTHER-WISE SPECIFIED TOLERANCE: 0.0: ±0.20 0.00: ±0.15 0.000: ±0.05	PART NO. 30D1-C2-S		DWG NO.	DATE 2008/04/10	
	2	修改螺絲(螺杆5.2mm改爲6.2mm)	2003/07/02	UNIT mm						
	1	修改貼紙(R.O.C. PATENT 105471 改爲 MINI ADAPTER)	2002/1/14	Page 1/1		DRAWN	Fu Hao	CHECKED	KevinLin	APPRD KevinLin
Customer	REVISION	DESCRIPTION	DATE							