
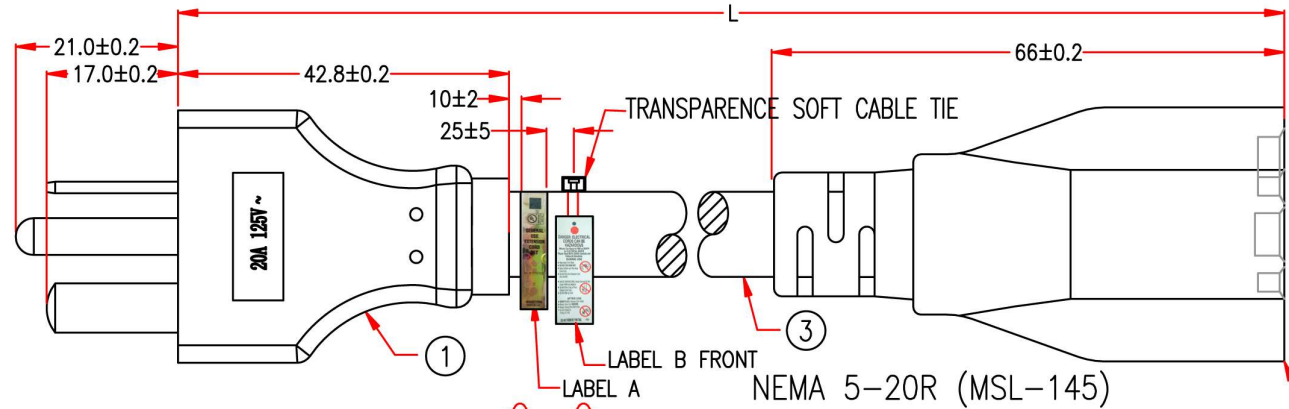


Customer No.: No.:1

P1: M-065A/073A  
P2: M-074A




P1

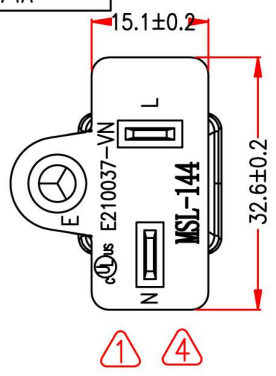

NEMA 5-20P (MSL-144)

NEMA 5-20R (MSL-145)

P2

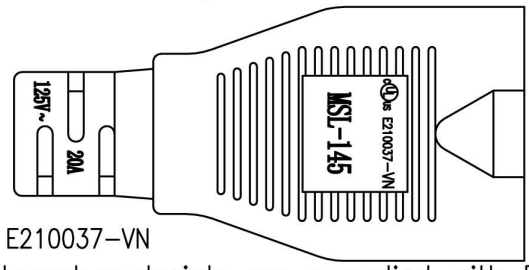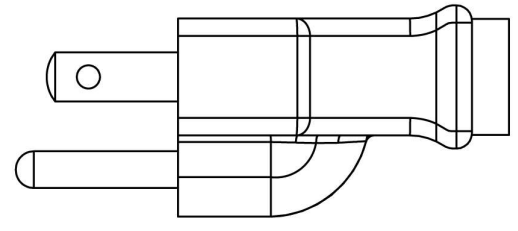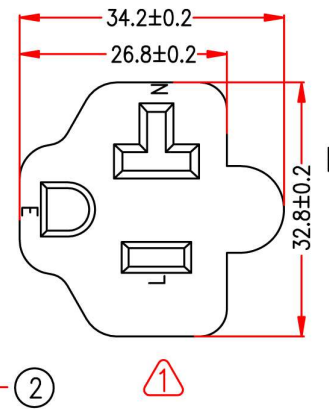

4 P1,P2: cULus E210037-VN  
NOTE: All relevant materials are complied with RoHS directive .

THE CABLE MARKING IS CONCAVE LETTERING MOULD  
MARKING:(UL) SJT 3/C 12AWG(3.31MM<sup>2</sup>) VW-1 105°c 300V E204978

4 c(UL) SJT 3/C 3.31MM<sup>2</sup>(12AWG) FT2 105°c 300V E204978 MSL-VN- 2

144145B2F12A(FP317-00)	
P1	P2
BLACK L _____ L	
WHITE N _____ N	
GREEN E _____ E	

No.	DESCRIPTION	Q'TY	Supplier
3	UL SJT 12AWG x 3C, OD 11.0mm, JACKET BLACK, DRAWING No.EPSJT011203C-158	L-20mm	M304
2	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09	M304
	BRACKET: HP-01700-08AWO	A1QC76-0406	1 M406
	TERMINAL: 98575LBS-0,12#	A1QB38-0257	1 M257
	TERMINAL: YC-06, (XD0T000326)	A1QB51-1179	1 M1179
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09	M304
	BRACKET: YST-308-NJA	A1QC77-0767	1 M767
	TERMINAL: 98695L	A1QB37-0257	2 M257
	TERMINAL: ø4.75, 98473	A1QB46-0257	1 M257



APPROVED		<p><b>SF Cable</b> - 1-888-275-8755 -</p>	<p>Cable Length Unless Other Spec. Tolerances:</p> <table> <tr> <td>0 ~200mm</td> <td>±10mm</td> </tr> <tr> <td>201~1000mm</td> <td>±20mm</td> </tr> <tr> <td>1001 ~1500mm</td> <td>±25mm</td> </tr> <tr> <td>1501~2100mm</td> <td>±30mm</td> </tr> <tr> <td>2100mm↑</td> <td>±40mm</td> </tr> </table>	0 ~200mm	±10mm	201~1000mm	±20mm	1001 ~1500mm	±25mm	1501~2100mm	±30mm	2100mm↑	±40mm
0 ~200mm	±10mm												
201~1000mm	±20mm												
1001 ~1500mm	±25mm												
1501~2100mm	±30mm												
2100mm↑	±40mm												
CHECKED													
DESIGNER													
DRAWING													
DATE	07/APR/21	ITEM NO.	PW-NM-520PR-XX	UNIT:mm									

5 REV.5 2021.04.07	
3 REV.3 2020.07.07	MODIFY P1 PLUG 4 REV.4 2020.11.24 MODIFY MARKING
2 REV.2 2020.06.23	MODIFY P1 INNER TOWER
1 REV.1 2020.05.06	MODIFY MOLDED LOGO

線長1FT的標籤如下:

線長3FT的標籤如下:

線長6FT以上(含6FT)的標籤如下:

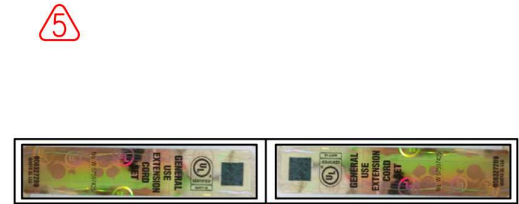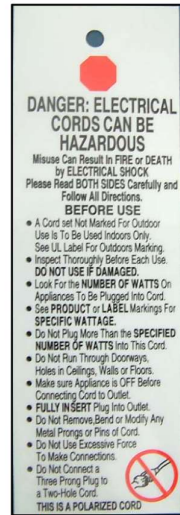

LABEL A

LABEL B BACK

LABEL B FRONT

LABEL B BACK


LABEL B FRONT

LABEL B BACK




LABEL B FRONT

長度隨實際長度而改變

PACKING :



P/N.	LENGTH(Lmm)
PW-NM-520PR-01	305mm
PW-NM-520PR-03	915mm
PW-NM-520PR-06	1830mm
PW-NM-520PR-10	3048mm
PW-NM-520PR-15	4572mm
PW-NM-520PR-25	7620mm

No.	DESCRIPTION	Q'TY	Supplier	
APPROVED	 SF Cable — 1-888-275-8755 —			
CHECKED				
DESIGNER				
DRAWING				
DATE				
07/APR/21	ITEM NO.	PW-NM-520PR-XX	UNIT:mm	 
		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm		

5	REV.5	2021.04.07	ADD UL LABEL	4	REV.4	2020.11.24	MODIFY MARKING
3	REV.3	2020.07.07	MODIFY P1 PLUG	2	REV.2	2020.06.23	MODIFY P1 INNER TOWER
1	REV.1	2020.05.06	MODIFY MOLDED LOGO				