


REVISION		DATE	APPROVED
LTR	DESCRIPTION		
A	NEW RELEASE	12/07/99	H.T.

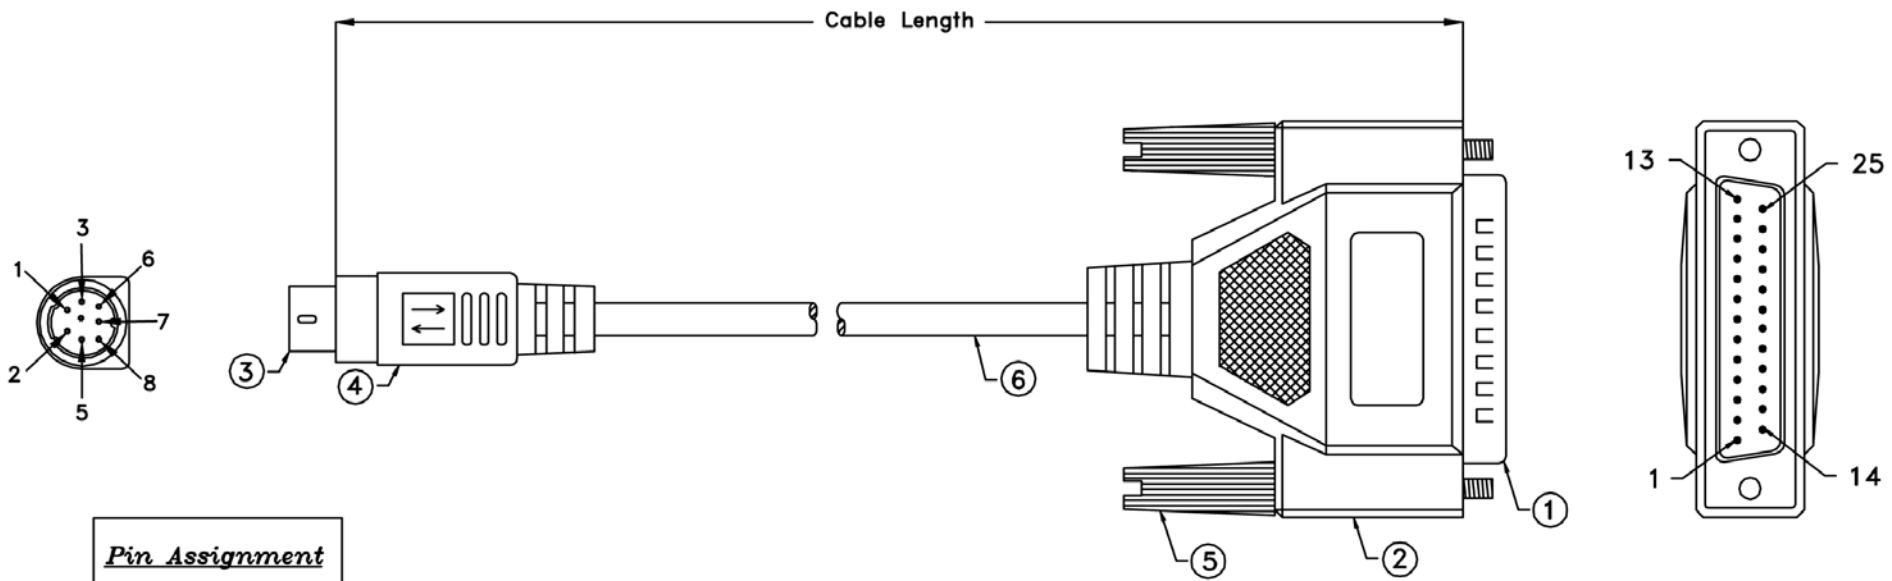

Pin Assignment

DB25 Female	DB25 Female
1	4
2	20
3	5
4	2
8	7
5	3
7	8
G	1

ITEM NO.	MATERIAL / SPECIFICATION	QTY REQD	UNIT
6.	28 AWG., 6C, Alum-Mylar Foil Shielded with Drain Wire, Beige Outer PVC jacket	XX	FT.
5.	4/40 Molded Thumbscrew, Color Beige	2	PCS.
4.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
3.	Mini Din 8 Pin Female w/Gold Plating Contacts	1	PCS.
2.	Beige Molded PVC Hood, Fully Shielded w/AL-FOIL	1	PCS.
1.	D-Sub 25 Pin Male W/Gold Plating Contacts	1	PCS.

CABLE ASSEMBLY PARTS LIST

UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES.	CUSTOMER
	R.F.Q. NO.
	DRAWN DATE Howie Tseng 12/07/99
	CHECKED
PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY	CUSTOMER APPROVAL

SFCABLE.COM			
TITLE Apple Mac Modem Cable Assembly (MDIN8M/DB25M, 6C+Drain Wire, Molded, Color Beige)			
SIZE	DWG NO.	PART NO. MM10-06	REV. A
SCALE: NONE	RELEASE DATE: 12/07/99	SHEET: 1 OF 1	